


## Bulletin 700-HA

- 10 A Contact Rating
- DPDT, 3PDT
- Pin Style Terminals
- Standard ON/OFF Flag Indicator
- Clear Cover for Easy Visual Inspection
- Optional Push-to-test and Manual Override
- Optional LED
- Optional Socket Mounted Surge Suppressor Module
- Optional Multi-Function Timing Module
- Type HAB—Bifurcated Contacts
- Type HAX—Gold Bifurcated Contacts

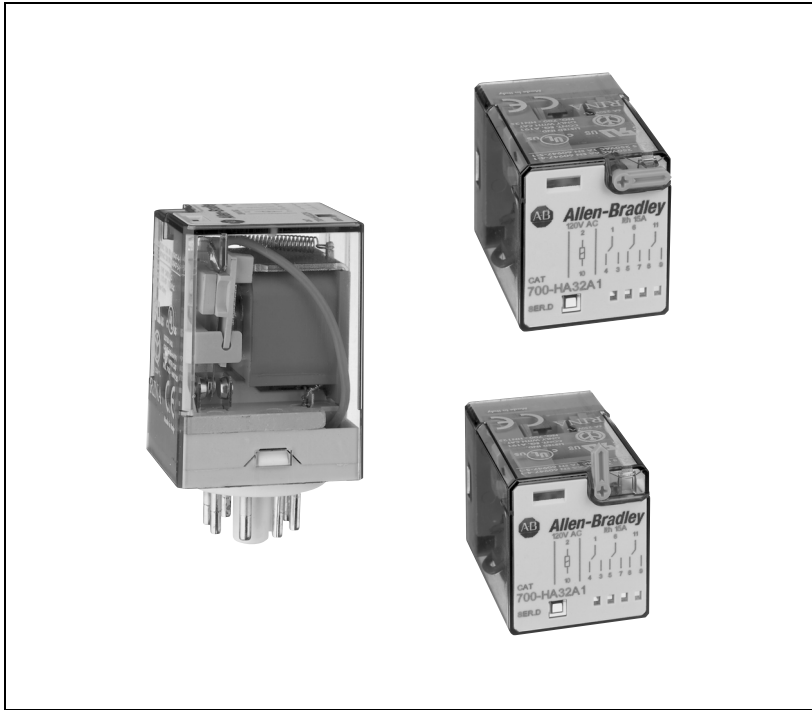

### TABLE OF CONTENTS

Description	Page	Description	Page
Product Selection .....	43	Timing Charts.....	51
Accessories .....	46	Approximate Dimensions .....	52
Specifications .....	49		

#### Description

The Bulletin 700-HA General Purpose Relays have pin-style terminals and are available in 2-pole (DPDT) or 3-pole (3PDT). They feature a standard ON/OFF flag indicator, and can be ordered with an optional push-to-test operator, a LED, and bifurcated or gold bifurcated contacts. Coils are available in a wide range of AC and DC voltages. Contacts are rated up to 10 A.

#### Conformity to Standards:

- EN 60947-4-1
- EN 60947-5-1
- IEC 947
- CSA 22.2
- UL 508
- NEMA/EE MAC compliant
- ICS-2 compliant

#### Approvals:

- cURus Recognized, File E3125 Guide NLDX 2
- cULus Listed, with Allen-Bradley socket
- CE Marked (per EU Low Voltage Directive 73/23 EEC 93/68 EEC)
- ABS (American Bureau of Shipping), File 00-GE195140-PDA
- RINA listed






**Your order must include:**

- Cat. No. of the plug-in relay plus suffixes of selection options.
- Cat. No. of socket required.
- If required, Cat. No. of any accessories.


#### Third Party Approval:

IMQ listed

**Bulletin 700-HA Tube Base Relay with PIN Terminals (Single Contact) —**  
**Mechanical ON/OFF Indicator included ❶**

	Description	Contact Rating	Wiring Diagrams		Coil Voltage	Cat. No. ❷❸❹	Factory-Stocked Item					
			U.S./Canada	International			❺	❻				
	DPDT 2-Pole 2 Form C Single AgNi Contact	10 A B300			6V AC	700-HA32A06						
					12V AC	700-HA32A12	✓					
					24V AC	700-HA32A24 ❺	✓					
					120V AC	700-HA32A1 ❺	✓	✓				
					240V AC	700-HA32A2 ❺	✓					
					277V AC	700-HA32A27❻	✓					
					6V DC	700-HA32Z06						
					12V DC	700-HA32Z12 ❺	✓					
					24V DC	700-HA32Z24 ❺	✓					
					36V DC	700-HA32Z36						
					48V DC	700-HA32Z48	✓					
					110V DC	700-HA32Z1	✓					
					125V DC	700-HA32Z01	✓					
					140V DC	700-HA32Z3						
Sockets		700-HN125	700-HN100 700-HN202									
	3PDT 3-Pole 3 Form C Single AgNi Contact	10 A B300			6V AC	700-HA33A06						
					12V AC	700-HA33A12						
					24V AC	700-HA33A24 ❺	✓					
					120V AC	700-HA33A1 ❺	✓	✓				
					240V AC	700-HA33A2 ❺	✓					
					6V DC	700-HA33Z06						
					12V DC	700-HA33Z12	✓					
					24V DC	700-HA33Z24 ❺	✓					
					48V DC	700-HA33Z48						
					110V DC	700-HA33Z1						
					125V DC	700-HA33Z01	✓					
					140V DC	700-HA33Z3						
					Sockets		700-HN126	700-HN101 700-HN203				

- ❶ For Time Module and Surge Suppressor Module, see page 47.
- ❷ LED Option: Add suffix (-4) to the selected Bulletin 700-HA Relay Cat. No., except for the 240V AC Units, add (-4L).
- ❸ Push-to-test, Manual Override, and LED Option: Add suffix (-3-4) to the selected Bulletin 700-HA Relay Cat. No., except for the 240V AC units, add (-3-4L).
- ❹ Push-to-test and Manual Override option: Add suffix (-3) to the selected Bulletin 700-HA relay.
- ❺ Bulk Package Option: Relay can be purchased at discounted prices in bulk quantities of 10. Add suffix (-99) to the selected relay catalog number.
- ❻ LED not available.
- ❼ Single pack
- ❽ Bulk pack

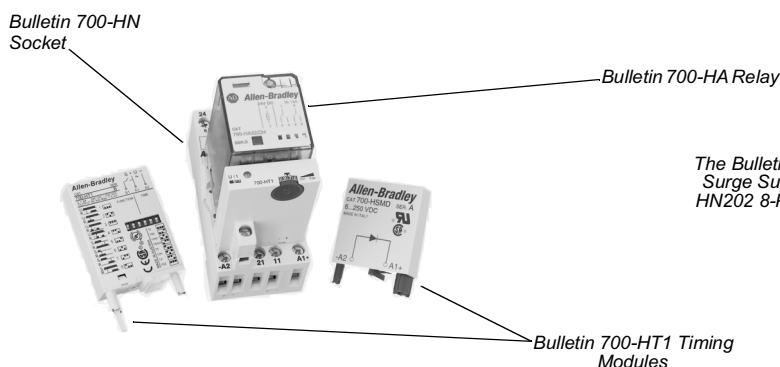






The Bulletin 700-HA Relays can be used together with Timing or Surge Suppressor Modules by plugging in to the Cat. No. 700-HN202 8-Pin Socket, or the Cat. No. 700-HN203 11-Pin Socket.

# General Purpose Relays

## Product Selection, Continued

### Bulletin 700-HAB Tube Base Relay with PIN Terminals (Bifurcated Contacts) —

Mechanical ON/OFF Indicator included ❶

	Description	Contact Rating	Wiring Diagrams		Coil Voltage	Cat. No. ❷❸❹	Factory-stocked Item ❺				
			U.S./Canada	International							
	DPDT 2-Pole 2 Form C Bifurcated AgNi Contacts	4 A			6V AC	700-HAB2A06					
					12V AC	700-HAB2A12					
					24V AC	700-HAB2A24					
					120V AC	700-HAB2A1	✓				
					240V AC	700-HAB2A2					
					277V AC	700-HAB2A27 ❻					
					6V DC	700-HAB2Z06					
					12V DC	700-HAB2Z12					
					24V DC	700-HAB2Z24	✓				
					36V DC	700-HAB2Z36					
					48V DC	700-HAB2Z48					
					110V DC	700-HAB2Z1					
					125V DC	700-HAB2Z01					
					140V DC	700-HAB2Z3					
Sockets		700-HN125	700-HN100 700-HN202								
	3PDT 3-Pole 3 Form C Bifurcated AgNi Contacts	4 A			6V AC	700-HAB3A06					
					12V AC	700-HAB3A12					
					24V AC	700-HAB3A24					
					120V AC	700-HAB3A1	✓				
					240V AC	700-HAB3A2					
					6V DC	700-HAB3Z06					
					12V DC	700-HAB3Z12					
					24V DC	700-HAB3Z24	✓				
					48V DC	700-HAB3Z48					
					110V DC	700-HAB3Z1					
					125V DC	700-HAB3Z01					
					140V DC	700-HAB3Z3					
					Sockets		700-HN126	700-HN101 700-HN203			

❶ For Time Module and Surge Suppressor Module, see page 47.

❷ LED Option: Add suffix (-4) to the selected Bulletin 700-HAB Relay Cat. No., except for the 240V AC Units, add (-4L).






❸ Push-to-test, Manual Override & Pilot Light Option: Add suffix (-3 -4) to the selected Bulletin 700-HAB Relay Cat. No., except for the 240V AC units, add (-3 -4L).

❹ Push-to-test and Manual Override option: Add suffix (-3) to the selected Bulletin 700-HA relay.

❺ Single Pack








❻ LED not available.





**Bulletin 700-HAX Tube Base Relay with PIN Terminals (Bifurcated Contacts with Gold Overlay) —  
 Mechanical ON/OFF Indicator Included ❶**

	Description	Contact Rating	Wiring Diagrams		Coil Voltage	Cat. No. ②③④	Factory-stocked Item ⑥				
			U.S./Canada	International							
	DPDT 2-Pole 2 Form C Bifurcated AgNi Contacts with Gold Overlay Sockets	4 A			6V AC	700-HAX2A06					
					12V AC	700-HAX2A12					
					24V AC	700-HAX2A24					
					120V AC	700-HAX2A1	✓				
					240V AC	700-HAX2A2					
					277V AC	700-HAX2A27⑤					
					6V DC	700-HAX2Z06					
					12V DC	700-HAX2Z12					
					24V DC	700-HAX2Z24	✓				
					36V DC	700-HAX2Z36					
					48V DC	700-HAX2Z48					
					110V DC	700-HAX2Z1					
					125V DC	700-HAX2Z01					
					140V DC	700-HAX2Z3					
Sockets		700-HN125	700-HN100 700-HN202								
	3PDT 3-Pole 3 Form C Bifurcated AgNi Contacts with Gold Overlay	4 A			6V AC	700-HAX3A06					
					12V AC	700-HAX3A12					
					24V AC	700-HAX3A24					
					120V AC	700-HAX3A1	✓				
					240V AC	700-HAX3A2					
					6V DC	700-HAX3Z06					
					12V DC	700-HAX3Z12					
					24V DC	700-HAX3Z24	✓				
					48V DC	700-HAX3Z48					
					110V DC	700-HAX3Z1					
					125V DC	700-HAX3Z01					
					140V DC	700-HAX3Z3					
					Sockets		700-HN126	700-HN101 700-HN203			

- ❶ For Time Module and Surge Suppressor Module, see page 47.
- ❷ LED Option: Add suffix **(-4)** to the selected Bulletin 700-HAX Relay Cat. No., except for the 240V AC Units, add **(-4L)**.
- ❸ Push-to-test and LED Option: Add suffix **(-3-4)** to the selected Bulletin 700-HAX Relay Cat. No., except for the 240V AC units, add **(-3-4L)**.
- ❹ Push-to-test and Manual Override option: Add suffix **(-3)** to the selected Bulletin 700-HA relay.
- ❺ LED not available.
- ❻ Single pack

**Bulletin 700-HA**  
**General Purpose Relays**  
**Accessories**


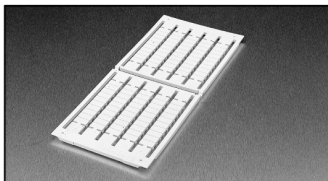
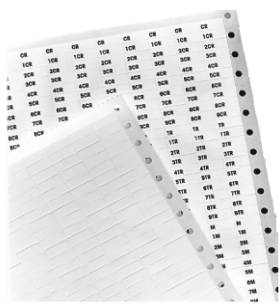
	Description	Pkg. Qty.	Cat. No.	Factory-stocked Item
 Cat. No. 700-HN100	<b>Screw Terminal Tube Base Sockets – Panel or DIN Rail Mounting. Guarded Terminal Construction</b> 8-pin for use with DPDT Bulletin 700-HA relays, -HX digital timing relays, -HT (ON-Delay) and -HRM, -HRC and -HV (Repeat Cycle) timing relays. Order must be for 10 sockets or multiples of 10.	10	700-HN100	✓
 Cat. No. 700-HN125	<b>Screw Terminal Tube Base Sockets – Panel or DIN Rail Mounting Open Style Construction</b> 8-pin for use with DPDT Bulletin 700-HA relays, -HT (ON-Delay) and -HRM, -HRC and -HV (Repeat Cycle) timing relays. Order must be for 10 sockets or multiples of 10. No retainer clip required.	10	700-HN125	✓
 Cat. No. 700-HN101	<b>Screw Terminal Tube Base Sockets – Panel or DIN Rail Mounting. Guarded Terminal Construction</b> 11-pin for use with 3PDT Bulletin 700-HA relays, -HR and -HT (OFF-Delay) timing relays. Order must be for 10 sockets or multiples of 10.	10	700-HN101	✓
 Cat. No. 700-HN126	<b>Screw Terminal Tube Base Sockets – Panel or DIN Rail Mounting. Guarded Terminal Construction</b> 11-pin for use with 3PDT Bulletin 700-HA relays, -HR and -HT (OFF-Delay) timing relays. Order must be for 10 sockets or multiples of 10.	10	700-HN126	✓
 Cat. No. 700-HN203	<b>8-Pin Socket – Can Be Used With or Without Timing Attachment or Surge Suppressor</b> Screw Terminal Tube Base Sockets – panel or DIN Rail mounting. Guarded terminal construction. Used with DPDT Bulletin 700-HA relays. Order must be for 10 sockets or multiples of 10.	10	700-HN202	✓
 Cat. No. 700-HN203	<b>11-Pin Socket – Can Be Used With or Without Timing Attachment or Surge Suppressor</b> Screw Terminal Tube Base Sockets – panel or DIN Rail mounting. Guarded terminal construction. Used with 3PDT Bulletin 700-HA relays. Order must be for 10 sockets or multiples of 10.	10	700-HN203	✓
 Cat. No. 199-DR1	<b>DIN Rail Mounting Pack</b> Standard 35 x 7.5 mm DIN Rail, 1 meter long, 10 rails per package. Order must be for 10 rails or multiples of 10.	10	199-DR1	✓

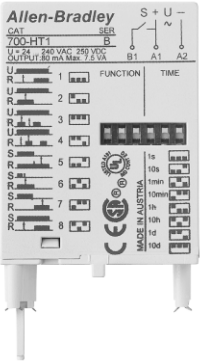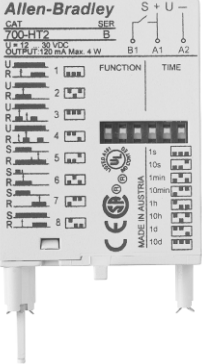	Description	Pkg. Qty.	Cat. No.	Factory-stocked Item
 <p>Cat. No. 700-HSV1</p>	<p><b>MOV Suppressor Module ①</b>                      Voltage Range: 24V AC                      24...30V DC                      Order must be for 20 modules or multiples of 20.</p> <p><b>MOV Suppressor Module ①</b>                      Voltage Range: 220...240V AC                      220...300V DC                      Order must be for 20 modules or multiples of 20.</p> <p><b>MOV Suppressor Module ①</b>                      Voltage Range: 110...120V AC                      110...150V DC                      Order must be for 20 modules or multiples of 20.</p>	20	700-HSV1	✓
 <p>Cat. No. 700-HSMD</p>	<p><b>Diode Surge Suppressor ①</b>                      Voltage Range: 6...250V DC                      Order must be for 20 modules or multiples of 20.</p>	20	700-HSMD	✓
 <p>Cat. No. 700-HT1</p>	<p><b>Multi-Function Multi-Range Time Module ①</b>                      Voltage range 24...240V AC 50/60 Hz and 24...250V DC, with a voltage variation of 85...110%. Repeat accuracy of &lt;0.5%. Reset time 150 ms. Refer to page 50 for Specifications.</p> <p>Eight (8) Timing Modes</p> <p>Eight (8) Timing Ranges:</p> <ol style="list-style-type: none"> <li>1. 1 s</li> <li>2. 10 s</li> <li>3. 1 min.</li> <li>4. 10 min.</li> <li>5. 1 hour</li> <li>6. 10 hours</li> <li>7. 1 day (24 hours)</li> <li>8. 10 days (240 hours)</li> </ol> <p>LED Indicator:</p> <ol style="list-style-type: none"> <li>1. Steady Green (G) for power on, flashing during timing.</li> </ol>	1	700-HT1	✓
 <p>Cat. No. 700-HT2</p>	<p><b>Multi-Function Multi-Range Time Module ①</b>                      Voltage range 12...30V DC, with a voltage variation of 90...110%. Repeat accuracy of &lt;0.5%. Reset time 150 ms. Refer to page 50 for Specifications.</p> <p>Eight (8) Timing Modes (See page 51 for further details.)</p> <p>Eight (8) Timing Ranges:</p> <ol style="list-style-type: none"> <li>1. 1 s</li> <li>2. 10 s</li> <li>3. 1 min.</li> <li>4. 10 min.</li> <li>5. 1 hour</li> <li>6. 10 hours</li> <li>7. 1 day (24 hours)</li> <li>8. 10 days (240 hours)</li> </ol> <p>LED Indicator:</p> <ol style="list-style-type: none"> <li>1. Steady Green (G) for power on, flashing during timing</li> </ol>	1	700-HT2	

① Suppressors and Time Modules easily plug into sockets (Cat. Nos. 700-HN202 and 700-HN203). For use with Bulletin 700-HA relays.

**ATTENTION:** Cat. No. 700-HT1 Series A is wired with switch “S” connected to “A2”, but 700-HT1 Series B is wired with switch “S” connected to “A1”. The Time Modules must be wired correctly. Check the front of the Time Modules for the correct wiring diagrams.

**Bulletin 700-HA**  
**General Purpose Relays**  
**Accessories, Continued**

	Description	Pkg. Qty.	Cat. No.	Factory-stocked Item
 Sample Retainer Clips	<b>Retainer Clip for Cat. Nos. 700-HN100, -HN101, -HN200, -HN201, -HN202, and -HN203 Sockets with Bulletin 700-HA Relays ❶</b> Secures relay in socket. Order must be for 10 clips or multiples of 10.	10	700-HN157	✓
 Snap-in markers	<b>Relay Identification Snap-in Markers ❷</b> Snap-in markers fit on top of Bulletin 700-HA relay covers. The following are blank cards. Squares slip into molded slot on top of <b>Bulletin 700-HA</b> or <b>700-HB</b> relay cover.	100	1492-SM5X12 1492-SM6X9 1492-SM6X12 1492-SM8X9 1492-SM8X12 1492-MP-Blank	●
	<b>Pre-printed identification tags</b> – contains 10 sheets of pre-printed and blank tags. Each sheet contains 13 sets of the markings CR...9CR, TR...9TR, M...9M, F, R, 1S, and 117 blank tags. Tags are peel-off with sticky backing for easy placement on relays.	10	700-N40	
	<b>Blank identification tags</b> – contains 10 sheets of blank identification tags for customer specialized printing. Each sheet contains 546 blank tags. Tags are peel-off with sticky backing for easy placement on relays.	10	700-N41	

❶ See Bulletin 700-HA Relay, Socket, and Retainer Clip Reference Chart

❷ Refer to terminal block marking systems within the Industrial Control Catalog, publication A114

❸ For pre-printed marker cards, turn to the following 1492 sections: 1492-SM5X12\_, 1492-SM6X9\_, 1492-SM8X9\_, 1492-SM8X12\_, 1492-MP\_

Relay Type	Socket	Retainer Clip
700-HA32	700-HN100	700-HN157
700-HAB2	700-HN125	Not Required ❹
700-HAX2	700-HN202	700-HN157
	700-HN200	700-HN157
700-HA33	700-HN201	700-HN157
700-HAB3	700-HN101	700-HN157
700-HAX3	700-HN126	Not Required ❹
	700-HN203	700-HN157

❹ Design of these sockets holds the relays securely and does not require retainer clips.

		Cat. No. 700-HA...		
<b>Electrical Ratings</b>				
Pilot Duty Rating ②		NEMA B300		
Rated Thermal Current ( $I_{th}$ )		HA = 10 A – 120V, 240V HAB/HAX = 6 A – 120V, 240V		
Rated Insulation Voltage ( $U_i$ )		250V IEC – 300V UL/CSA		
Contacts	Inductive	<b>Make</b>	<b>Break</b>	<b>Hp</b>
	120V AC	▶ ◀	◀ ▶	0.33
	240V AC	30 A	3 A	1
	DC	15 A	1.5 A	
		30V DC, 10 A		
Min. Low Energy Permissible Load		HA = 10V, 50 mA HAB= 6V, 30 mA HAX = 6V, 1 mA		
Permissible Coil Voltage Variation		85...110% of Nominal Voltage at 50 Hz 85...110% of Nominal Voltage at 60 Hz 80...110% of Nominal Voltage at DC		
Coil Consumption ±10%	AC Coils	<b>50 Hz</b>	<b>60 Hz</b>	
	Inrush	3.3 VA	2.85 VA	
	Sealed	2.2 VA	1.9 VA	
	DC Coils	1.3 W		
Max. Allowable Leakage		25% of VA		
		10% of W		
<b>Design Specification/Test Requirements</b>				
<b>Electrical</b>				
Dielectric Withstand Voltage				
Pole-to-Pole		2000V		
Contact to Coil		2000V		
Contact to Frame		2000V		
Electrical Life (Operating)		100,000 min.		
<b>Mechanical</b>				
Degree of Protection (Open Type) IEC 529		IP 40		
Mechanical Life Operations (AC/DC)		> 20 x 10 <sup>6</sup> / 50 x 10 <sup>6</sup>		
Switching Frequency Operations		3600/HR		
Coil Voltages		See Product Selection		
Operating Time	Max. Pickup	10 ms		
	Max. Dropout	10 ms		
Maximum Operating Rate		4 Ops/s		
Vibration	Endurance	5 G		
	Operational	2.5 G		
Shock	Endurance	50 G		
	Operational	9 G		
<b>Environmental</b>				
Temperature	Operating	AC/DC	-40...+70°C	
	Storage	AC/DC	-40...+100°C	
Altitude		2000 m (6560 ft)		
<b>Construction</b>				
Insulating Material		Molded High Dielectric Material		
Enclosure		Transparent Dust Cover		
Contact Material		700-HA: 10 A– AgNi		
		700-HAB: 4 A–Bifurcated AgNi		
		700-HAX: 4 A–Bifurcated/Gold Plating AgNi		
Terminal Markings on Socket		In accordance with EN50 0005		
Sockets		8-Pin Socket — 700-HN100, -HN125, -HN202 11-Pin Socket — 700-HN101, -HN126, -HN203		
Certifications		CE, cULus listed, IMQ, RINA, ABS		


① Performance Data – See page Important-2, Industrial Controls Catalog.

② NEMA Rating Chart is on page 29.




**Bulletin 700-HA**  
**General Purpose Relays**  
**Specifications, Continued ❶**


**700-HA Relay Performance Graphs**



Contact life vs. AC1 load at 1,800 cycles/h



Breaking capacity for DC1 load at 1800 cycles/h  
**A=** load applied to 1 contact  
**B=** load applied to 2 contacts in series  
**C=** load applied to three contacts in series

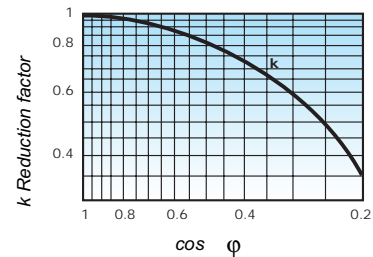


Load reduction factor vs.  $\cos \phi$

		Time Module Cat. No. 700-HT1	Time Module Cat. No. 700-HT2
<b>Electrical Ratings</b>			
Operating Voltage Range	24...240V AC at 50/60 Hz 24...250V DC		12...30V DC
Power Consumption	24V AC/DC 70 mW 240V AC/DC 700 mW		12V DC 40 mW 30V DC 100 mW
Maximum Output Current	80 mA (2 W at 24V DC)		120 mA (2 W at 24V DC)
Maximum Output Voltage	265V AC, 275V DC		33V DC
Maximum Output Power	7.5 VA (30 mA at 240V AC)		4 W
<b>Mechanical</b>			
Degree of Protection of Input (B1) Terminal	IP 20 (Guarded Terminal)		
Input Terminal Wire Range	2 x 1.5 mm <sup>2</sup> (2 # 16 AWG...1 # 20 AWG)		
Input Terminal Torque Range	0.45...0.8 Nm (4...7 lb-in.)		
LED Indicator	Steady when Power On and Flashing during Timing Period		
Repeat Accuracy ❷	<0.5% or 5 ms		
Timing Change	Voltage Effect Temp. Effect	≤0.001%/V ≤0.01%/°C	≤0.001%/V ≤0.01%/°C
Reset Time	Power Reset: 150 ms Signal Reset: 50 ms AC, 30 ms DC		Power Reset: 150 ms Signal Reset: 10 ms DC
Selectable Timing Ranges	3 DIP Switches, 8 Ranges (set from 10...100% of range): 1 s, 10 s, 1 min., 10 min., 1 hr., 10 hr., 24 hr., 240 hr.		
Selectable Timing Modes	3 DIP Switches, 8 Modes: Power ON–Delay Single Shot – Power On Repeat Cycle – Starting with OFF–Delay Repeat Cycle – Starting with ON–Delay Signal OFF–Delay Single Shot – Signal is a Pulse Single Shot – Signal Off Signal ON–Delay		
Thumbwheel Scale Accuracy	≤5% of Time Range		
<b>Environmental</b>			
Temperature	Operating Storage	–25...+55°C (–13...+131°F) –55...+85°C (–67...+185°F)	
Altitude	2000 m (6560 ft)		
<b>Construction</b>			
Enclosure	Gray Plastic Housing		
Mounting with Socket Only	8- or 11-Pin Socket with Module Plug		
Sockets	700-HN202 (8-Pin with Plug) 700-HN203 (11-Pin with Plug)		
Certifications	CE, UL listed, CSA		

❶ Performance Data - See page Important-2, publication A113.

❷ At constant voltage and temperature.

**Timing Charts, Cat. Nos. 700-HT1 and 700-HT2 Multi-Function Time Module (t = Time Range 0.10 s...240 h)**  
**Cat. Nos. 700-HT1 and -HT2 Timing Modes, Time Description, Timing Charts, and DIP Switch Selections**



**Terms:**  
**U** is Power Input (Steady Green LED)  
**R** is Relay Output  
**S** Control, **+A1** Socket, **B1** Timer  
**t** is the resulting Time Delay (Flashing Green LED)


**1. Power On-Delay**

When the input voltage U is applied, the timing delay t begins. The relay contacts R change state after the time delay is complete. The contacts will return to their shelf state when the power U is removed. The terminal B1 is not used in this mode.




**2. Single Shot — Power On**

When the input voltage U is applied, the relay contacts R change state immediately and the timing cycle begins. When the time delay t is complete, the contacts return to shelf state. When the input voltage U is removed, the contacts return to their shelf state. The terminal B1 is not used in this mode.

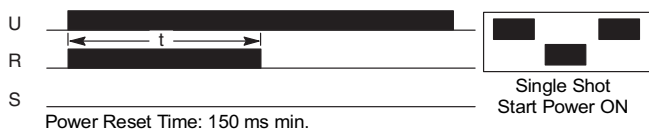


**3. Repeat Cycle — Starting with Relay Energized**

When the input voltage U is applied, the relay contacts R change state immediately and time delay t begins. When the time delay t is complete, the contacts return to their shelf state for time delay t. This cycle will repeat until the input voltage U is removed. The terminal B1 is not used in this mode.

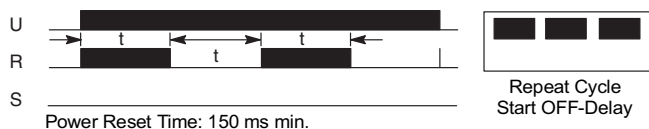


**4. Repeat Cycle — Starting with On-Delay**

When the input voltage U is applied, the time delay t begins. When the time delay t is complete, the relay contacts R change state for the time delay t. This cycle will repeat until the input voltage U is removed. The terminal B1 is not used in this mode.

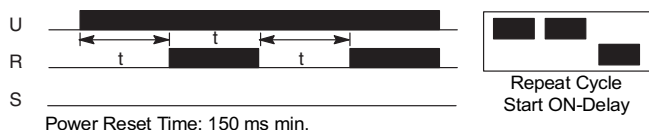


**5. Signal Off-Delay**

The input voltage U must be applied continuously. When the control S (wired at B1) is energized, the relay contacts R change state. When the control S is de-energized, the delay t begins. When delay t is complete, the contacts R return to their shelf state. If signal S is energized before the time delay t is complete, then the Time Module is reset, the delay begins again, and the relay contacts remain in their energized state. If the input voltage U is removed, the relay contacts R return to their shelf state.

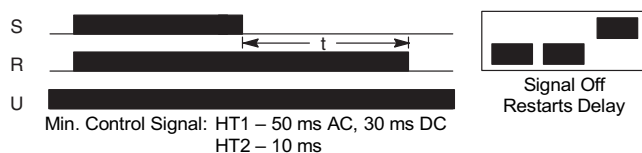


**6. Single Shot — Signal Is a Pulse**

The input U must be applied continuously. When the Control S (wired to B1 terminal) is energized, the relay contacts R change state and the time delay t begins. When the time delay t is completed, the contacts return to their shelf state. If signal S is de-energized before time t is completed, contacts R still stay in their changed state. The input signal S has control again when delay is completed or power reset. If the input voltage U is removed, the relay contacts R return to their shelf state.

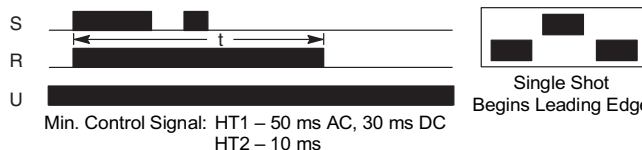


**7. Single Shot — Signal Off**

The input voltage U must be applied continuously. When the control S (wired at B1) is energized and then de-energized, the relay contacts R change state for the time delay t. If the control S is pulsed during the time period t, the relay contacts R will not be affected. If the input power is removed, the relay contacts R return to their shelf state.

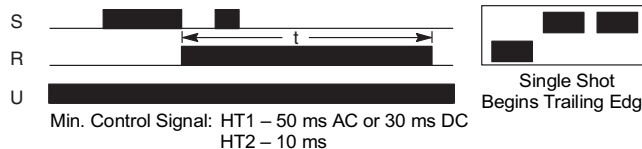

**8. On Delay — Pulse Controlled**


The input voltage U must be applied continuously. When the control S (wired at B1) is energized, the time delay t begins. When the time delay t is complete, the relay contacts R change state and remain energized until the control S is de-energized. If the input power U is removed the relay contacts R return to their shelf state.

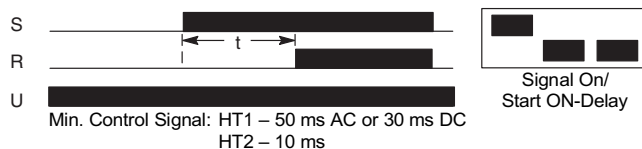


# General Purpose Relays

## Approximate Dimensions

Dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

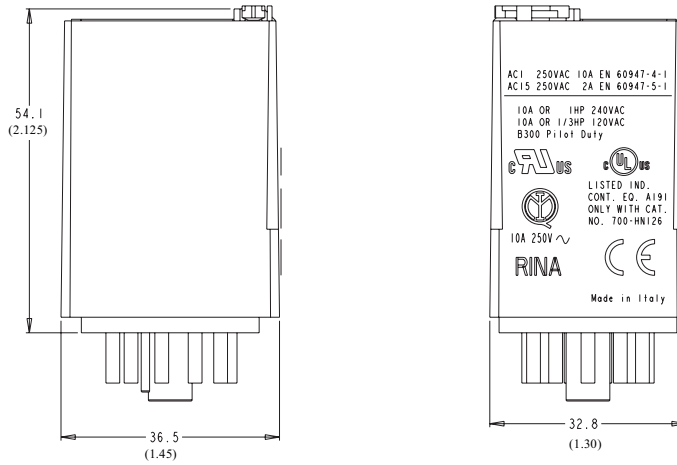


Bulletin 700-HA Relay

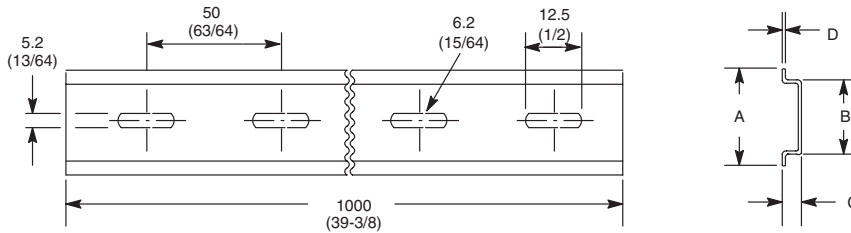

Cat. No. 199-DR1 DIN Mounting Rail Series B  
 Cat. No. 199-DR4 DIN Mounting Rail Series B Has No Mounting Holes

Cat. No.	A	B	C	D	Approx. Shipping Wt.
199-DR1	35 (1-3/8)	27 (1-1/16)	7.5 (19/64)	1.02 (1/64)	1.85 kg (4.07 lbs.) (10/pkg)
199-DR4	35 (1-3/8)	27 (1-1/16)	15 (19/32)	2.3 (3/32)	3.68 kg (8 lbs.) (5/pkg)


Dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

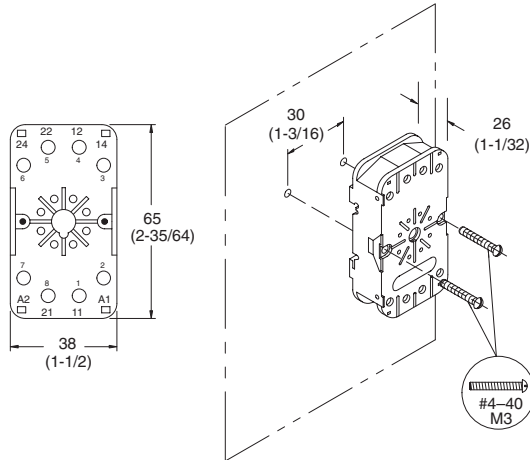

Cat. No. 700-HN100


Panel Mounting

Wire Size: 2 x 2.5 mm<sup>2</sup>  
 Single Wire – Up to #12 AWG  
 Double Wire – 2 x 2.5 mm<sup>2</sup> (#2–14 AWG... #2–20 AWG)  
 (Either Solid or Stranded)  
 Strip Length: 9 mm (3/8") – Torque: 0.8 Nm (7 lb.-in.)

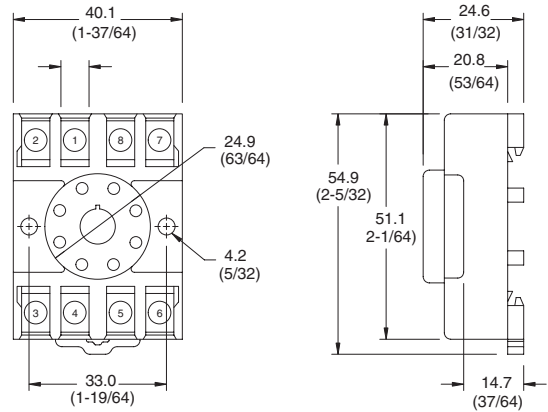

Cat. No. 700-HN125 ①


Wire Size: 2 x 2.5 mm<sup>2</sup>  
 Single Wire – Up to 12 AWG  
 Double Wire – 2 x 2.5 mm<sup>2</sup> (#2–#4 AWG... #2–20 AWG)  
 (Either Solid or Stranded)  
 Strip Length: 9 mm (3/8") – Torque: 0.8 Nm (7 lb.-in.)

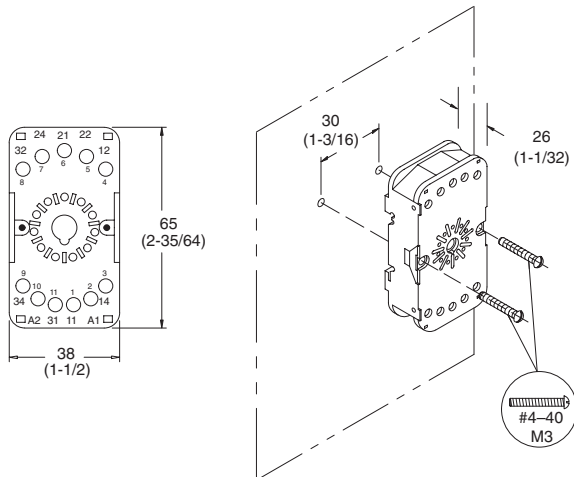

Cat. No. 700-HN101

Panel Mounting

Wire Size: 2 x 2.5 mm<sup>2</sup>  
 Single Wire – Up to #12 AWG  
 Double Wire – 2 x 2.5 mm<sup>2</sup> (#2–14 AWG... #2–20 AWG)  
 (Either Solid or Stranded)  
 Strip Length: 9 mm (3/8 in.) – Torque: 0.8 Nm (7 lb.-in.)

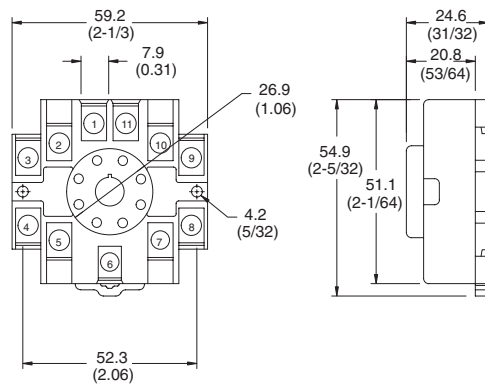

Cat. No. 700-HN126 ①


Wire Size: 2 x 2.5 mm<sup>2</sup>  
 Single Wire – Up to #12 AWG  
 Double Wire – 2 x 2.5 mm<sup>2</sup> (#2–#14 AWG... #2–20 AWG)  
 (Either Solid or Stranded)  
 Strip Length: 9 mm (3/8 in.) – Torque: 0.8 Nm (7 lb.-in.)

① Cat. No. 199-FSM Surge Suppressors fit on the coil terminals. See page 195.

# General Purpose Relays


## Approximate Dimensions, Continued

Dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

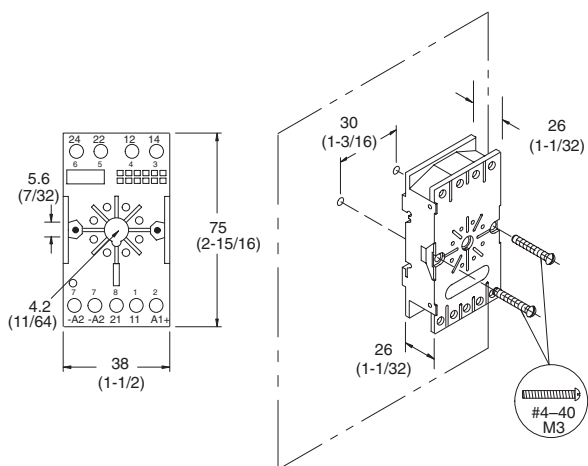

Cat. No. 700-HN202

Panel Mounting

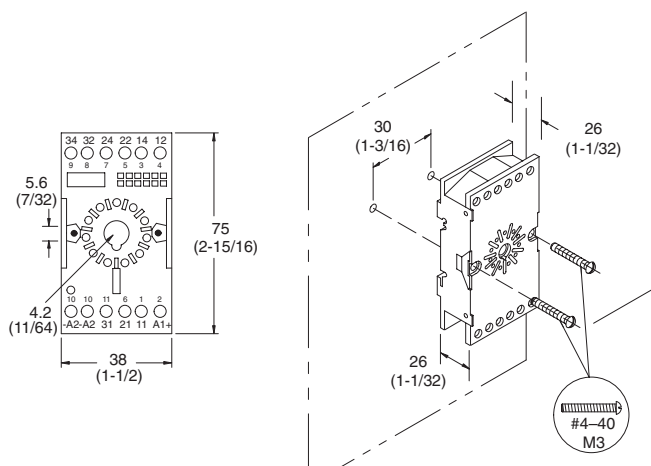


Cat. No. 700-HN203


Panel Mounting

Wire Size: 2 x 2.5 mm<sup>2</sup>  
 Single Wire – Up to #12 AWG  
 Double Wire – 2 x 2.5 mm<sup>2</sup> (#2–14 AWG... #2–20 AWG)  
 (Either Solid or Stranded)  
 Strip Length: 9 mm (3/8 in.) – Torque: 0.8 Nm (7 lb.-in.)

Wire Size: 2 x 2.5 mm<sup>2</sup>  
 Single Wire – Up to #12 AWG  
 Double Wire – 2 x 2.5 mm<sup>2</sup> (#2–14 AWG ... #2–20 AWG)  
 (Either Solid or Stranded)  
 Strip Length: 9 mm (3/8 in.) – Torque: 0.8 Nm (7 lb.-in.)

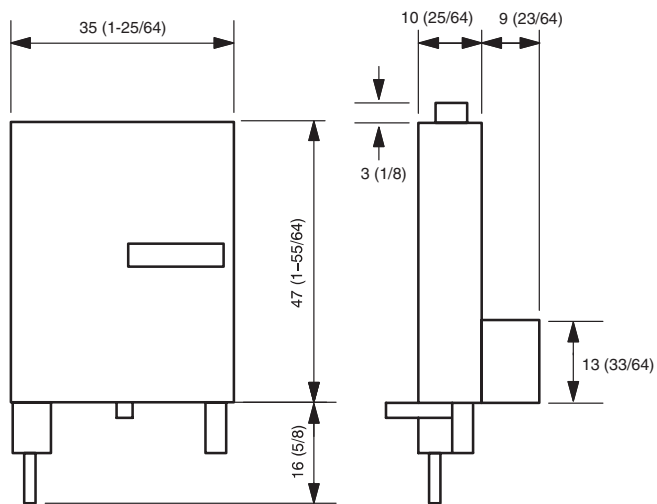

Cat. Nos. 700-HT1 and 700-HT2

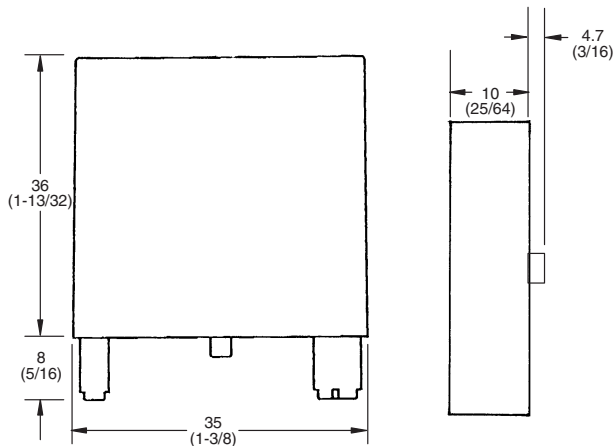

Cat. Nos. 700-HSV1, 700-HSV2, 700-HSV3, and 700-HSMD

Wire Size: 2 x 1.5 mm<sup>2</sup> (#2 – 16 AWG... #1–20 AWG)  
 (Either Solid or Stranded)  
 Strip Length: 9 mm (3/8 in.) – Torque: 0.8 Nm (7 lb.-in.)