

Bulletin 700-HK Slim Line Relay

[Product Overview](#)

Bulletin 700-HK — “Slim Line” Relay



- 8 A/16 A contact ratings
- DPDT/SPDT
- Plug-in blade-style terminals
- Retainer clip with sockets
- Options: LED, push-to-test and manual override, socket-mounted surge suppressor module, or timer module
- Standard ON/OFF flag indicator
- Relay faceplate accepts optional Bulletin 1492 snap-in markers
- Choice of standard silver/nickel contacts or silver/nickel with gold plated contacts
- Maximum duty version available

See [Specifications](#)

[Build a Catalog Number](#)

Slim Line Relay with Plug-in Quick Connect Terminations







	Description	Contact Rating	Wiring Diagrams		Coil Voltage	Cat. No. † ‡ §
			U.S./Canada	International		
	SPDT 1-Pole 1 Form C AgNi Contacts	16 A			6V AC	700-HK36A06
					12V AC	700-HK36A12
					24V AC	700-HK36A24
					120V AC	♣ 700-HK36A1
					240V AC	♣ 700-HK36A2
					6V DC	700-HK36Z06
					12V DC	700-HK36Z12
					24V DC	♣ 700-HK36Z24
					48V DC	700-HK36Z48
Bulletin 700-HK SPDT	Socket		700-HN121, 700-HN221, 700-HN223	700-HN121, 700-HN221, 700-HN223	110V DC	700-HK36Z1
	DPDT 2-Pole 2 Form C AgNi Contacts	8 A			6V AC	700-HK32A06
					12V AC	700-HK32A12
					24V AC	700-HK32A24
					120V AC	700-HK32A1
					240V AC	700-HK32A2
					6V DC	700-HK32Z06
					12V DC	700-HK32Z12
					24V DC	700-HK32Z24
					48V DC	700-HK32Z48
Bulletin 700-HK DPDT	Socket		700-HN122, 700-HN222, 700-HN224	700-HN122, 700-HN222, 700-HN224	110V DC	700-HK32Z1


♣ LED Option: Add suffix (-4) to the selected Bulletin 700-HK relay Cat. No. except for the 240V AC units, add (-4L).









‡ For AgNi Contact with Gold Plating: Replace “3” with “X” in Cat. No. For example, if Cat. No. 700-HK36A1 is required with Gold Plating, the new catalog number is 700-HKX6A1.

§ Push-to-Test + Manual Override + LED Option: Add suffix (-3-4) to the selected 700-HK Relay catalog number, except for the 240V AC Units, add (-3-4L).

♣ For high inductive, Tungsten, or Capacitive load applications, replace the “3” with a “M” in the catalog number. Only available in a SPDT configuration and with 24V DC, 120V AC or 240V AC coil voltages.

	Description	Pkg. Qty.	Cat. No.
	Screw Terminal Socket – Panel or DIN Rail Mounting 5-blade miniature socket with 10 A rating for use with 1-pole, Bulletin 700-HK relays. Accepts forked lug conductors. Socket includes a retainer clip.	10	700-HN121
Cat. No. 700-HN121			
	Screw Terminal Socket – Panel or DIN Rail Mounting 5-blade miniature socket with 16 A rating for use with 1-pole, Bulletin 700-HK relays. Retainer clips are packaged separately with socket. Guarded terminal construction and compatible with optional plug-in module accessories.	10	700-HN221
Cat. No. 700-HN221			
	Spring Clamp Terminal Socket – Panel or DIN Rail Mounting 5-blade miniature socket for use with 1-pole, Bulletin 700-HX relays.	10	700-HN223
	Screw Terminal Socket – Panel or DIN Rail Mounting 8-blade miniature socket with 5 A rating for use with 2-pole, Bulletin 700-HK relays. Accepts forked lug conductors. This socket includes a retainer clip.	10	700-HN122
Cat. No. 700-HN122			
	Screw Terminal Socket – Panel or DIN Rail Mounting 8-blade miniature socket with 8 A rating for use with 2-pole, Bulletin 700-HK relays. Retainer clips are packaged separately with socket. Guarded terminal construction and compatible with optional plug-in module accessories.	10	700-HN222
Cat. No. 700-HN222			
	Spring Clamp Terminal Socket – Panel or DIN Rail Mounting 8-blade miniature socket for use with 2-pole Bulletin 700-HX relays.	10	700-HN224
	Flange Mount Adapter Used for panel-mounting bulletin 700-HK relays. Order must be for 10 adapters or multiples of 10.	10	700-HN226
Cat. No. 700-HN226			
	35 mm Rail Mount Adapter Mounts bulletin 700-HK relays to a 35 mm rail. Order must be for 10 adapters or multiples of 10.	10	700-HN227
Cat. No. 700-HN227			
	Socket Retainer Clip and Ejection Lever For use with 700-HN22, -HN222, -HN223, and -HN224 sockets. Orders must be for 10 clips or multiples of 10.	10	700-HN229
Cat. No. 700-HN229			

	Description	Pkg. Qty.	Cat. No.
	Diode Surge Suppressor Voltage Range: 6...220V DC used with 700-HN221, 700-HN222 sockets	10	700-ADR
	Diode with LED Surge Suppressor Voltage Range: 6...24V DC used with 700-HN221, 700-HN222 sockets	10	700-ADL1R
	Diode with LED Surge Suppressor Voltage Range: 28...60V DC used with 700-HN221, 700-HN222 sockets	10	700-ADL2R
	Diode with LED Surge Suppressor Voltage Range: 110...220V DC used with 700-HN221, 700-HN222 sockets	10	700-ADL3R
	Varistor with LED Surge Suppressor Voltage Range: 6...24V AC used with 700-HN221, 700-HN222 sockets	10	700-AV1R
	Varistor with LED Surge Suppressor Voltage Range: 110...240V AC used with 700-HN221, 700-HN222 sockets	10	700-AV3R
	RC Surge Suppressor Voltage Range: 6...24V AC/DC used with 700-HN221, 700-HN222 sockets	10	700-AR1
	RC Surge Suppressor Voltage Range: 110...240V AC/DC used with 700-HN221, 700-HN222 sockets	10	700-AR2

	Timing Module On-Delay or One-Shot selectable voltage range: 12...24V AC/DC used with sockets that accept plug-in accessory modules.	On-Delay U (A1/A2)  LED & R 	1	700-AT3
	Timing Module On-Delay or One-Shot selectable voltage range: 110...125V AC used with sockets that accept plug-in accessory modules.	One-Shot U (A1/A2)  LED & R 		700-AT3A1
	Timing Module On-Delay or One-Shot selectable voltage range: 230...240V AC used with sockets that accept plug-in accessory modules.			700-AT3A2
	8-Way Jumper can be cut to required length. Rated 10 A - 250V. Used with 700-HN221, 700-HN222 sockets.	Red	1	700-HN180R
		Grey		700-HN180G
		Blue		700-HN180B
Cat. No. 700-HN180				
	DIN (#3) symmetrical hat rail 35 x 7.5 x 1 m		10	199-DR1
Cat. No. 199-DR1				
	Relay Identification Snap-in Markers Snap-in markers fit on top of product covers. The following are blank cards.		100	1492-MS6X9
				1492-MS6X12
				1492-MS8X12

Note: Spring clamp sockets are also available. Cat. No. 700-HN223 for Cat. No. 700-HK36 and Cat. No. 700-HN224 for 700-HK32.


Bulletin 700-HK Slim Line Relay, Socket, and Retainer Clip Reference Chart

Relay Type	Socket Cat. No.	Retainer Clip Cat. No.
700-HK32	700-HN122, 700-HN222, 700-HN224	Provided
700-HK36	700-HN121, 700-HN221, 700-HN223	


Cat. No. 700-HK...					
Electrical Ratings					
Rated Thermal Current (I_{th})	1-Pole, 1 CO, SPDT – 16 A 2-Pole, 2 CO, DPDT – 8 A				
Rated Insulation Voltage (U_i)	250V IEC, 300V UL/CSA				
Contacts	Inductive V AC				
	120V AC	AC-15, 6.2 A B300 Pilot Duty, 3 A A300 (700-HKM_) 1/3 Hp (0.24 kW) 1-phase	120V AC	AC-15, 2.9 A B300 Pilot Duty, 3.0 A 1/4 Hp (0.18 kW), 1-phase	
	240V AC	AC-15, 3.1 A B300 Pilot Duty, 1.5 A A300 (700-HKM_) 3/4 Hp (0.55 kW), 1-phase	240V AC	AC-15, 1.4 A B300 Pilot Duty, 1.5 A 1/2 Hp (0.37 kW), 1-phase	
	230V AC	0.55 kW, 1-phase	230V AC	0.37 kW, 1-phase	
	Inductive V DC	24V DC	DC-13, 5.0 A	24V DC	DC-13, 3.0 A
	125V DC	DC-13, 0.2 A R300 Pilot Duty, 0.22 A	125V DC	DC-13, 0.2 A R300 Pilot Duty, 0.22 A	
	250V DC	DC-13, 0.1 A R300 Pilot Duty, 0.11 A	5 A, 250V AC	DC-13, 0.1 A R300 Pilot Duty, 0.11 A	
	Resistive	230V AC	AC-1, 16 A	230V AC	AC-1, 8 A
	277V AC	16 A, General Use	277V AC	8 A, General Use	
	Make, Break & Continuous	30V DC	DC-1, 12 A 10 A, Resistive	30V DC	DC-1, 6 A 6 A, Resistive
Min. Permissible Contact Ratings	300 mW (5V/60 mA or 60V/5 mA) for AgNi Contacts (700-HK3_) 50 mW (5V/10 mA or 25V/2 mA) for AgNi + Gold Contacts (700-HKX_) 500 mW (100V/5 mA or 5V/100 mA) for AgSnO ₂ Contacts (700-HKM_)				
Permissible Coil Voltage Variation	Pickup: holding Voltage: Must Dropout Voltage:	80...110% of Nominal Voltage at 50/60 Hz, 73...110% of Nominal Voltage at DC 80% of Nominal V AC at 50/60 Hz, 40% of Nominal V DC 20% of Nominal V AC at 50/60 Hz, 10% Nominal V DC			
Power Consumption	1.2V A (V AC Coils), 0.5 W (V DC Coils)				
Coil Voltages	See Overview/Product Selection				
Design Specification/Test Requirements					
Dielectric Withstand Voltage	Pole to Pole (VRMS)	2000V AC			
	Contact to Coil (VRMS)	4000V AC			

Mechanical			
Degree of Protection		IP 20 (guarded terminal sockets), RT II – Flux-proof (Relay)	
Mechanical Life Operations		10 x 10 ⁶	
Electrical Life Cycles		230V AC, 16 A Resistive: 100 000 min. 277V AC, 16 A Resistive: 30 000 min. 30V DC, 10 A Resistive: 30 000 min. B300, R300, Hp (kW): 6000 min. A300 (700-HKM_): 100,000 min.	230V AC, 8 A Resistive: 100 000 min. 277V AC, 8 A Resistive: 30 000 min. 30V DC, 6 A Resistive: 30 000 min. B300, R300, Hp (kW): 6000 min.
Switching Frequency		Mechanical: 18,000 cycles/hr. Electrical: 900 cycles/hr.	
Operating Time at Nominal Voltage at 20 °C (ms)	Pickup	15 ms max.	
	Dropout	5 ms max.	
Vibration	Operational	10...2000 Hz, 0.76 mm (0.03 in.) 2.5 G	
	Non-Operational	10...2000 Hz, 0.76 mm (0.03 in.) 5.0 G	
Shock	Operational	15 G	
	Non-Operational	50 G	
Environmental			
Temperature	Operating	-40...+70 °C (-40...+158 °F)	
	Storage	-40...+85 °C (-40...+185 °F)	
Altitude		2000 m (6560 ft)	
Construction			
Insulating Material		Molded High Dielectric Material	
Enclosure		Transparent Dust Cover	
Contact Material		700-HK3_: Silver nickel (AgNi); 700-HKX_: Silver Nickel + Gold Plating (AgNi + Au); 700-HKM_: Silver Tin Oxide (AgSnO ₂)	
Terminal Markings on Socket		In accordance with EN 50005	
Sockets		1-Pole	2-Pole
	Screw Terminal	700-HN121 (10 A @ 70 °C) 700-HN221 (16 A @ 50 °C, 12 A @ 70 °C)	700-HN122 (2 x 5 A @ 70 °C) 700-HN222 (2 x 8 A @ 70 °C)
	Spring Clamp (Available September 2006)	700-HN223 (15 A @ 40 °C with 2 conductors per terminal) (10 A @ 70 °C with 1 conductor per terminal)	700-HN224 (2 x 8 A @ 70 °C)
Approvals			
Certifications		CSA Certified, File 75088, UL Recognized, File E3125 Guide NLDX2/NLCX8, cULus Listed with Allen-Bradley sockets (File No. 3125 Guide NLDX/NLDX7), CE Marked	
Standards		EN61810-1, CSA 22.2 No. 14, UL 508	


Approximate Dimensions are shown in millimeters (inches). Approximate Dimensions are not intended to be used for manufacturing purposes.

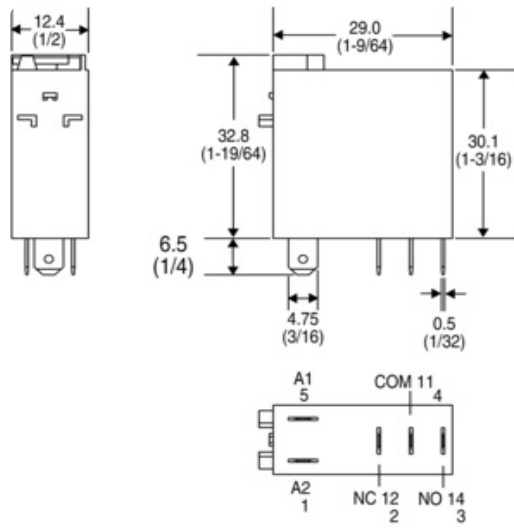


Cat. No. 700-HK36_ (SPDT)

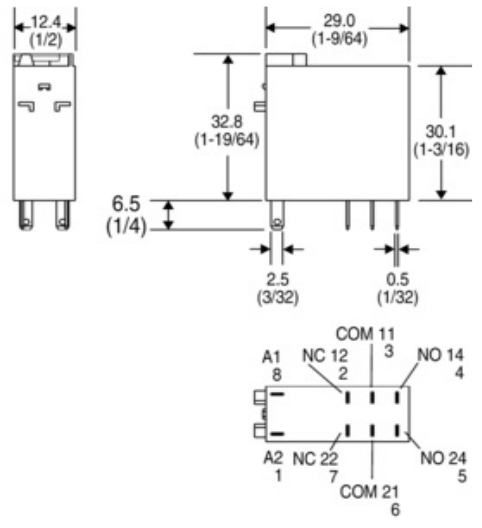


Cat. No. 700-HK32_ (DPDT)

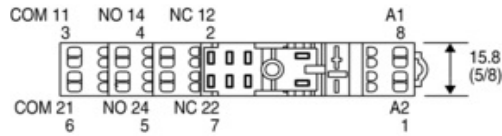


Cat. No. 700-HN224

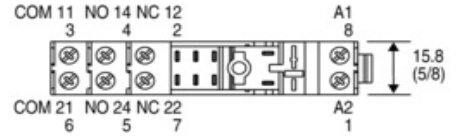


Cat. No. 700-HN222

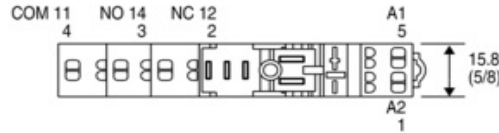


Cat. No. 700-HN223

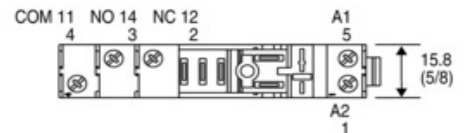


Cat. No. 700-HN221

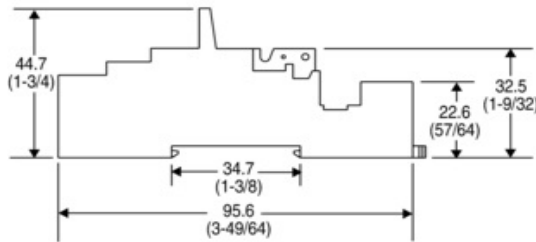


Cat. No. 700-HN223, 700-HN224
Wire Size: 0.2 mm²...1.5 mm² (#24 AWG...#14 AWG)
Either Solid or Stranded
Strip Length: 8 mm (5/16 in)

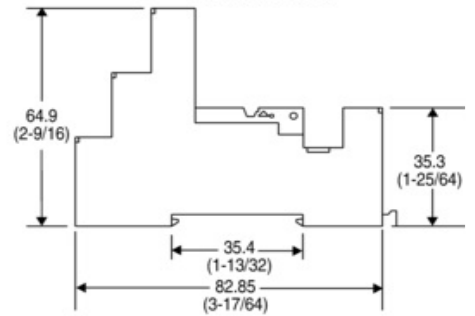


Cat. No. 700-HN221, 700-HN222
Wire Size: 0.2 mm²...2.5 mm² (#24 AWG...#12 AWG)
Either Solid or Stranded
Strip Length: 8 mm (5/16 in), Torque: 0.8Nm (7.0 lb.-in.)



Cat. No. 700-HN226




Cat. No. 700-HN227

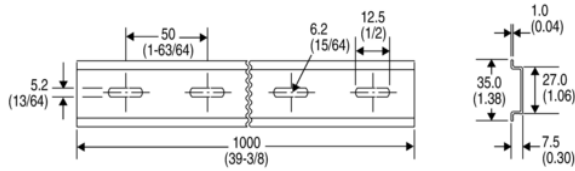


Cat. No. 199-DR4 DIN Mounting Rail Series B Has No Mounting Holes
Cat. No. 199-DR1 DIN Mounting Rail Series B

Cat. No.	A	B	C	D	Approx. Shipping Wt.
199-DR1	35 (1-3/8)	27 (1-1/16)	7.5 (19/64)	1.02 (1/64)	1.85 kg (4.07 lb) (10/pkg)
199-DR4	35 (1-3/8)	27 (1-1/16)	15 (19/32)	2.3 (3/32)	3.68 kg (8 lb) (5/pkg)



Cat. No. 700-HN121

Wire Size: 2 x 2.5 mm² Single Wire – Up to #14 AWG Double Wire – 2 x 2.5 mm² (#2–14 AWG... #2–20 AWG) (Either Solid or Stranded) Strip Length: 9 mm (3/8 in.) – Torque: 0.8 N•m (7 lb•in)



Cat. No. 700-HN122

Wire Size: 2 x 2.5 mm² Single Wire – Up to #14 AWG Double Wire – 2 x 2.5 mm² (#2–14 AWG... #2–20 AWG) (Either Solid or Stranded) Strip Length: 9 mm (3/8 in.) – Torque: 0.8 N•m (7 lb•in)

* Holes required for mounting [3 mm (1/8 in.) diameter].