

BULLETIN 700-FE ECONOMY TIMING RELAY

[Product Overview](#)

Bulletin 700-FE – Economy Timing Relay

- Adjustable function and timing range timing relays
- DIN Rail mounted without cost of socket
- 17.5 mm wide, multi-function or single function
- Available as 1 N.O. or SPDT contact output, 5 A
- Timing ranges from 0.05 s...10.0 hr
- Coil surge protection



See Specifications.

[Build a Catalog Number](#)

Multi-Function

This device offers you the flexibility of selecting one of 4 single timing functions.

Operating Mode	Contact Output	Timing Range	Input Voltage	Cat. No.
ON-delay, OFF-delay, One Shot, Flasher (repeat cycle starting with pulse)	1 N.O.	0.05 s...10 hr (6 settings) [§]	24V AC/DC * 110...240V AC 50/60 Hz	700-FEM1TU22
ON-delay, OFF-delay, One Shot, Flasher (repeat cycle starting with pulse)	SPDT (1 C/O)	0.05 s...10 hr (6 settings) [§]	24V...48V AC/DC 24...240V AC 50/60 Hz	700-FEM3TU23

* Voltage is either 24V AC/DC 50/60 Hz.

§ Time ranges: 0.05 s...1 s, 0.5...10 s, 0.05...1 min, 0.5...10 min, 0.05...1 hr, 0.5...10 hr.

Single-Function

This device offers you one specific timing function.

Operating Mode	Contact Output	Timing Ranges [§]	Input Voltage	Cat. No.
ON-delay	1 N.O.	0.05 s...10 hr (6 settings)	24V AC/DC * 110...240V AC 50/60 Hz	700-FEA1TU22
	SPDT (1 C/O)	0.05 s...10 hr (6 settings)	24V...48V AC/DC 24...240V AC 50/60 Hz	700-FEA3TU23
OFF-delay	1 N.O.	0.05 s...10 hr (6 settings)	24V AC/DC * 110...240V AC 50/60 Hz	700-FEB1TU22
	SPDT (1 C/O)	0.05 s...10 hr (6 settings)	24V...48V AC/DC 24...240V AC 50/60 Hz	700-FEB3TU23

One Shot	1 N.O.	0.05 s...10 hr (6 settings)	24V AC/DC * 110...240V AC 50/60 Hz	700-FED1TU22
	SPDT (1 C/O)	0.05 s...10 hr (6 settings)	24V...48V AC/DC 24...240V AC 50/60 Hz	700-FED3TU23
Fleeting OFF-delay	SPDT (1 C/O)	0.05 s...10 hr (6 settings)	24V...48V AC/DC 24...240V AC 50/60 Hz	700-FEE3TU23
Flasher (repeat cycle starting with pulse)	1 N.O.	0.05 s...10 hr (6 settings)	24V AC/DC * 110...240V AC 50/60 Hz	700-FEF1TU22
	SPDT (1 C/O)	0.05 s...10 hr (6 settings)	24V...48V AC/DC 24...240V AC 50/60 Hz	700-FEF3TU23
Pulse Converter	SPDT (1 C/O)	0.05 s...10 hr (6 settings)	24V...48V AC/DC 24...240V AC 50/60 Hz	700-FEL3TU23


* Voltage is either 24V AC 50/60 Hz or 24V DC.

§ Time ranges: 0.05 s...1 s, 0.5...10 s, 0.05...1 min, 0.5...10 min, 0.05...1 hr, 0.5...10 hr.

Special Functions


Operating Mode	Contact Output	Timing Range Δ	Input Voltage	Cat. No.
Star-Delta	2 N.O. with 1 Common	0.15 s...10 min (4 settings)	24V...48V AC/DC 24...240V AC 50/60 Hz	700-FEY2QU23

Δ Time ranges: 0.15...3 s, 0.5...10 s, 3 s...1 min, 30 s...10 min.



	Description	Pkg. Quantity	Cat. No.
	Panel Mounting Adapter For surface mounting according to drilling plan EN 50 002	5	199-FSA
	Label Sheet 105 self-adhesive paper labels each, 6 x 17 mm	10	100-FMS

Function and Connection Diagrams



(A) On-Delay

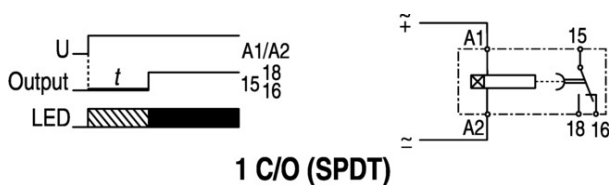


(B) Off-Delay

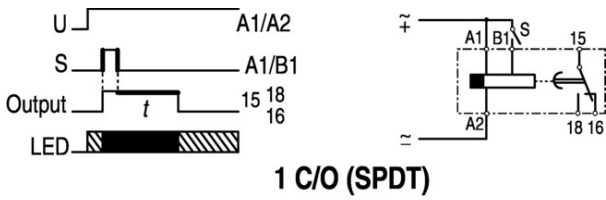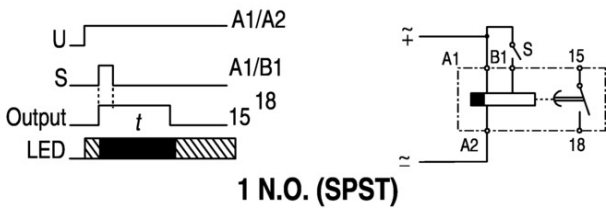


(D) One Shot

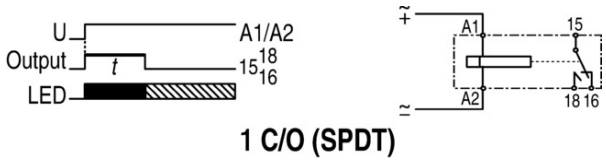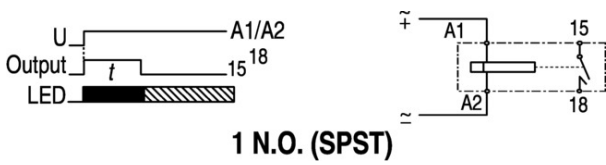

(F) Flasher (Repeat Cycle Starting with Pulse)

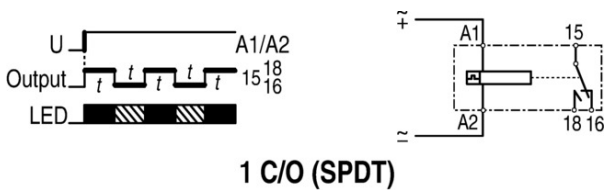

(E) Fleeting Off-Delay

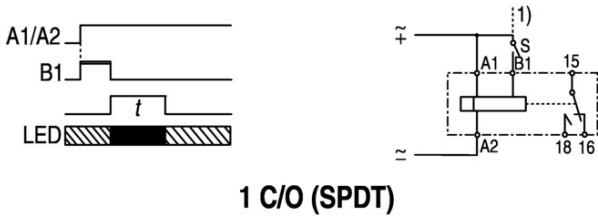


1 C/O (SPDT)



(L) Pulse Converter



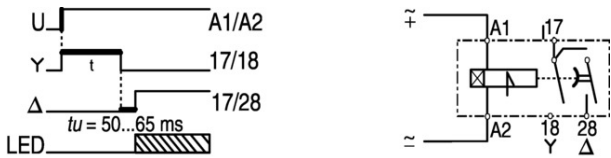

(Y) Star-Delta Timing Relay





Bi-Color LED: 1 C/O (SPDT) or 1 N.O. Contact Timers

 LED U = green: Supply voltage available.
 LED Relay = red: Output is energized.

Single Color LED: 2 N.O. with Common

 ON = green
 OFF = red

Time Characteristics (according to VDE 0435, part 2021)



			1 N.O.		SPDT
Setting Accuracy		±5% of full scale			
Repeatability		±1% of setting (typical)			
Tolerance		By voltage: ±0.01%/DU By temperature: ±0.25%/°C		By voltage: ±0.001%/DU By temperature: ±0.025%/°C	
Supply					
Supply Voltage		24V AC/DC† and 110...240V AC, 50/60 Hz		24...48V DC and 24...240V AC, 50/60 Hz	
Voltage Tolerance	AC	-15%/+10%			
	DC	-15%/+20%			

Power Consumption	0.5 W at 24V DC, 5 VA at 240V AC		
Time Energized	100%		
Reset Time	100 ms		
Cable Length (Supply Voltage Control)	Max. 250 m (750 feet)		
Pulse Control (B1)			
Impulse Duration	³ 250 ms	³ 50 ms (AC), ³ 30 ms (DC)	
Input Voltage	supply voltage range		
Input Current	1 mA		
Cable Length	Max. 250 m without parallel load between B1 and A2 Max. 50 m with load (< 3 kW) between B1 and A2		
Outputs			
Contact Type	1 N.O. contact		1 Form C - SPDT contact
Dielectric Withstand Voltage	Contact-to-coil	4000 V	
Switching Capacity	Power	1250 VA	
	According to IEC 947-5-1	AC-1	5 A /250V AC (resistive load)
		AC-14	1 A/250V AC (inductive load)
		DC-13	1 A/24V DC (inductive load)
According to UL 508	NEMA D300 - 1 A/300V AC		
Short-Circuit Resistance	6 A gL (Fast Blow Fuse)		
Life	Mechanical	20 million operations	
	Electrical	0.4 million at 1 A/250V AC, resistive 0.4 million at 0.5 A/250V AC, cos f = 0.4 0.4 million at 1 A/24V DC, resistive	
State Indicator	1 Bi-Color LED (Supply; Relay)		
Certifications	cULus Listed (File No. E14840, Guide NKCR/NKCR7), CE Marked		
Standards	EN/IEC 60947-1, EN/IEC 60947-5-1, UL 508, CSA 22.2 No. 14		

* See Performance Data


‡ Voltage is either 24V DC or AC 50/60 Hz.

General Specifications


	 1 N.O.	 SPDT
Insulation Characteristics	2 kV AC/50 Hz test voltage according to VDE 0435 and 4 kV 1.2/50 ms surge voltage according to IEC 60947-1 between all inputs and outputs	
EMC/Interference Immunity	The following requirements are fulfilled: Surge capacity of the supply voltage according to IEC 61000-4-5: Level 3 Burst according to IEC 61000-4-4: Level 3 ESD discharge according to IEC 61000-4-2: Level 3	
EMC/Emission	electromagnetical fields according to EN 55 022: Class B	
Safe Isolation	according to VDE 0106 T 101	
Climatic Withstand	56 cycles (24 hr) at 25...40 °C and 95% relative humidity according to IEC 60068-2-30	
Vibration Resistance	4 g in three axes at 10...500 Hz, test FC according to IEC 60068-2-6	
Shock Resistance	50 g according to IEC 68-2-27	
Protection Class IEC 60947-1	Enclosure:IP 40 Terminal:IP 20	
Weight	60 g	60 g
Certifications	cULus, CE Certified	cULus, Germanischer Lloyd, CE Certified

Ambient Temperature	Open: -25...+60 °C Enclosed: -25...+45 °C Storage: -40...+85 °C
Connections	Screw terminal M3 for Pozidriv No.1, Philips and slotted screws No.2. suitable for power screw-driver. Rated tightening torque 8.8 lb.-in. (max. 1.0 Nm) For terminal cross-sections of 1 x 0.5 mm ² ...2 x 1.5 mm ² (solid) or 2 x 1.5 mm ² (stranded with sleeve), #20...14 AWG. Finger protection according to EN 50274
Mounting	For surface mounting in any position; snap-on mounting on 35 mm DIN Rail or by adapter and two screws (M4 type)
Disposal	Synthetic materials without dioxin according to EC/EFTA-Notification No. 93/0141/D electrical contacts are AgCdO

Approximate dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

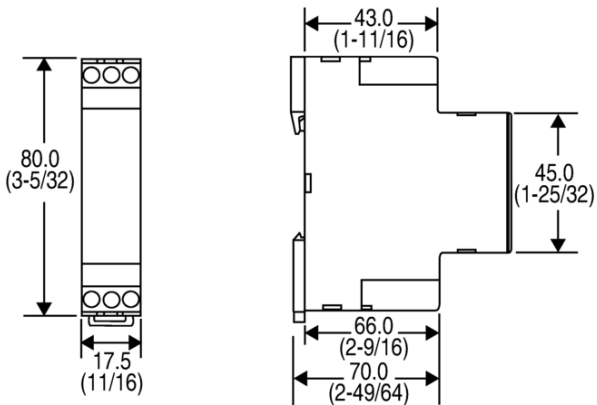

Cat. No. 700-FE...

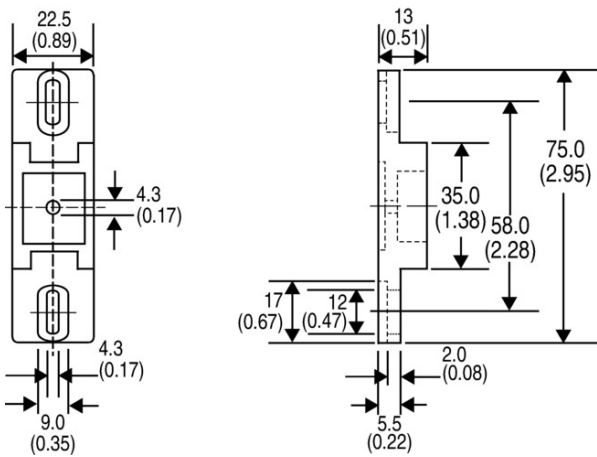

Cat. No. 199-FSA...