

SKM 100GB123D



SEMITRANS® 2

IGBT Modules

SKM 100GB123D

SKM 100GAL123D


SKM 100GAR123D

Features

- MOS input (voltage controlled)
- N channel, Homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to $6 \times I_{Cnom}$
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (10 mm) and creepage distances (20 mm)

Typical Applications*

- AC inverter drives
- UPS

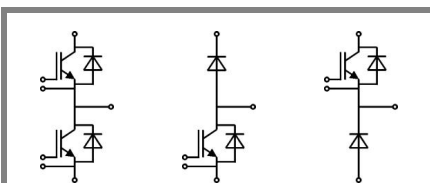

GB

GAL

GAR

Absolute Maximum Ratings		$T_C = 25\text{ }^\circ\text{C}$, unless otherwise specified			
Symbol	Conditions	Values		Units	
IGBT					
V_{CES}	$T_j = 25\text{ }^\circ\text{C}$	1200		V	
I_C	$T_j = 150\text{ }^\circ\text{C}$	$T_{case} = 25\text{ }^\circ\text{C}$	100		A
		$T_{case} = 80\text{ }^\circ\text{C}$	90		A
I_{CRM}	$I_{CRM} = 2 \times I_{Cnom}$	150		A	
V_{GES}		± 20		V	
t_{psc}	$V_{CC} = 600\text{ V}; V_{GE} \leq 20\text{ V}; T_j = 125\text{ }^\circ\text{C}$ $V_{CES} < 1200\text{ V}$	10		μs	
Inverse Diode					
I_F	$T_j = 150\text{ }^\circ\text{C}$	$T_{case} = 25\text{ }^\circ\text{C}$	95		A
		$T_{case} = 80\text{ }^\circ\text{C}$	65		A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$	150		A	
I_{FSM}	$t_p = 10\text{ ms}; \sin.$	$T_j = 150\text{ }^\circ\text{C}$	720		A
Freewheeling Diode					
I_F	$T_j = 150\text{ }^\circ\text{C}$	$T_{case} = 25\text{ }^\circ\text{C}$	130		A
		$T_{case} = 80\text{ }^\circ\text{C}$	90		A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$	200		A	
I_{FSM}	$t_p = 10\text{ ms}; \sin.$	$T_j = 150\text{ }^\circ\text{C}$	900		A
Module					
$I_{t(RMS)}$		200		A	
T_{vj}		- 40... + 150		$^\circ\text{C}$	
T_{stg}		- 40... + 125		$^\circ\text{C}$	
V_{isol}	AC, 1 min.	2500		V	

Characteristics		$T_C = 25\text{ }^\circ\text{C}$, unless otherwise specified				
Symbol	Conditions	min.	typ.	max.	Units	
IGBT						
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 2\text{ mA}$	4,5	5,5	6,5	V	
I_{CES}	$V_{GE} = 0\text{ V}, V_{CE} = V_{CES}$		0,1	0,3	mA	
V_{CE0}		$T_j = 25\text{ }^\circ\text{C}$	1,4		1,6	V
		$T_j = 125\text{ }^\circ\text{C}$	1,6		1,8	V
r_{CE}	$V_{GE} = 15\text{ V}$	$T_j = 25\text{ }^\circ\text{C}$	14,6		18,6	m Ω
		$T_j = 125\text{ }^\circ\text{C}$	20		25,3	m Ω
$V_{CE(sat)}$	$I_{Cnom} = 75\text{ A}, V_{GE} = 15\text{ V}$		2,5	3	V	
C_{ies}			5	6,6	nF	
C_{oes}	$V_{CE} = 25, V_{GE} = 0\text{ V}$		0,72	0,9	nF	
C_{res}			0,38	0,5	nF	
Q_G	$V_{GE} = -8\text{ V} - +20\text{ V}$		750		nC	
R_{Gint}	$T_j = \text{ }^\circ\text{C}$		5		Ω	
$t_{d(on)}$	$R_{Gon} = 15\text{ }^\circ\Omega$	$V_{CC} = 600\text{ V}$ $I_C = 75\text{ A}$	30		60	ns
t_r			70		140	ns
E_{on}	$R_{Goff} = 15\text{ }^\circ\Omega$	$T_j = 125\text{ }^\circ\text{C}$ $V_{GE} = \pm 15\text{ V}$	10			mJ
$t_{d(off)}$			450		600	ns
t_f			70		90	ns
E_{off}			8		mJ	
$R_{th(j-c)}$	per IGBT		0,18		K/W	



SEMITRANS® 2

IGBT Modules

SKM 100GB123D

SKM 100GAL123D


SKM 100GAR123D

Features

- MOS input (voltage controlled)
- N channel, Homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to $6 \times I_{cnom}$
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (10 mm) and creepage distances (20 mm)

Typical Applications*

- AC inverter drives
- UPS

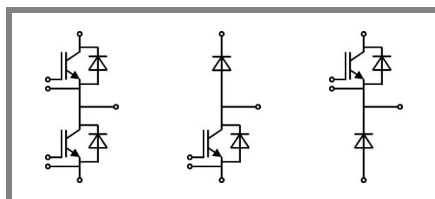

GB

GAL


GAR

Characteristics			min.	typ.	max.	Units
Inverse Diode						
$V_F = V_{EC}$	$I_{Fnom} = 75 \text{ A}; V_{GE} = 0 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$ $T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$		2 1,8	2,5	V V
V_{F0}		$T_j = 25 \text{ }^\circ\text{C}$ $T_j = 125 \text{ }^\circ\text{C}$		1,1	1,2	V V
r_F		$T_j = 25 \text{ }^\circ\text{C}$ $T_j = 125 \text{ }^\circ\text{C}$		12	17	mΩ mΩ
I_{RRM} Q_{rr} E_{rr}	$I_F = 75 \text{ A}$ $di/dt = 800 \text{ A}/\mu\text{s}$ $V_{GE} = 0 \text{ V}; V_{CC} = 600 \text{ V}$	$T_j = 125 \text{ }^\circ\text{C}$		40 3		A μC mJ
$R_{th(j-c)D}$	per diode				0,5	K/W
Freewheeling Diode						
$V_F = V_{EC}$	$I_{Fnom} = 100 \text{ A}; V_{GE} = 0 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$ $T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$		2 1,8	2,5	V V
V_{F0}		$T_j = 25 \text{ }^\circ\text{C}$ $T_j = 125 \text{ }^\circ\text{C}$		1,1	1,2	V V
r_F		$T_j = 25 \text{ }^\circ\text{C}$ $T_j = 125 \text{ }^\circ\text{C}$		9	13	V V
I_{RRM} Q_{rr} E_{rr}	$I_F = 100 \text{ A}$ $di/dt = 1000 \text{ A}/\mu\text{s}$ $V_{GE} = 0 \text{ V}; V_{CC} = 600 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}$		50 5		A μC mJ
$R_{th(j-c)FD}$	per diode				0,36	K/W
Module						
L_{CE}					30	nH
$R_{CC'+EE'}$	res., terminal-chip	$T_{case} = 25 \text{ }^\circ\text{C}$ $T_{case} = 125 \text{ }^\circ\text{C}$		0,75 1		mΩ mΩ
$R_{th(c-s)}$	per module				0,05	K/W
M_s	to heat sink M6			3	5	Nm
M_t	to terminals M5			2,5	5	Nm
w					160	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

SKM 100GB123D

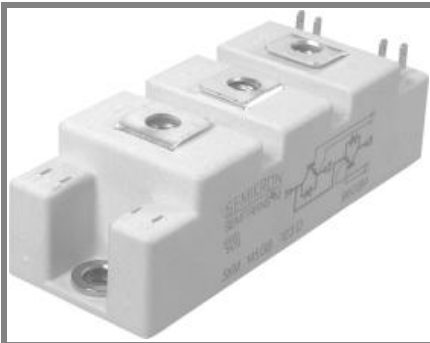

SEMITRANS[®] 2

IGBT Modules

SKM 100GB123D

SKM 100GAL123D

SKM 100GAR123D


Features







- MOS input (voltage controlled)
- N channel, Homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to $6 \times I_{cnom}$
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (10 mm) and creepage distances (20 mm)







Typical Applications*

- AC inverter drives
- UPS

Z_{th}			
Symbol	Conditions	Values	Units
$Z_{th(j-c)I}$			
$R_{\theta j-c}$	$i = 1$	162	mk/W
$R_{\theta j-c}$	$i = 2$	14	mk/W
$R_{\theta j-c}$	$i = 3$	2,7	mk/W
$R_{\theta j-c}$	$i = 4$	1,3	mk/W
$\tau_{th j-c}$	$i = 1$	0,204	s
$\tau_{th j-c}$	$i = 2$	0,0242	s
$\tau_{th j-c}$	$i = 3$	0,0013	s
$\tau_{th j-c}$	$i = 4$	0	s
$Z_{th(j-c)D}$			
$R_{\theta j-c}$	$i = 1$	320	mk/W
$R_{\theta j-c}$	$i = 2$	150	mk/W
$R_{\theta j-c}$	$i = 3$	0,0265	mk/W
$R_{\theta j-c}$	$i = 4$	3,5	mk/W
$\tau_{th j-c}$	$i = 1$	0,05	s
$\tau_{th j-c}$	$i = 2$	0,0104	s
$\tau_{th j-c}$	$i = 3$	0,0034	s
$\tau_{th j-c}$	$i = 4$	0,0003	s

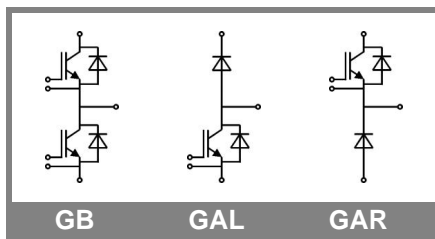

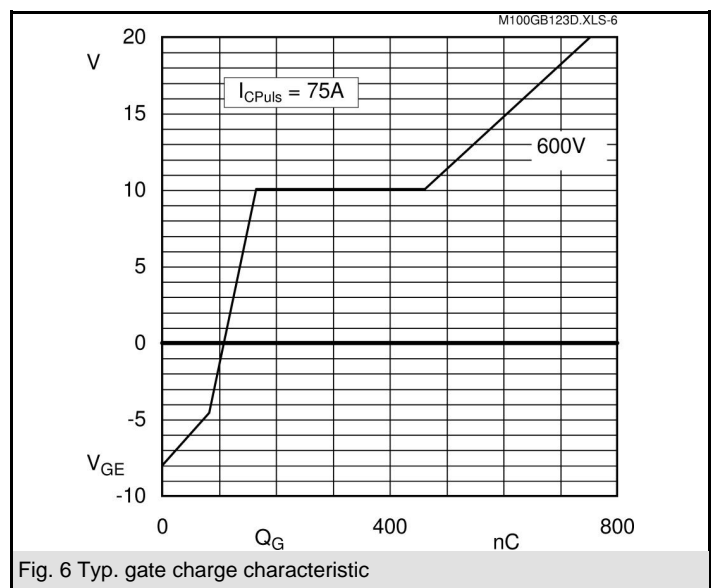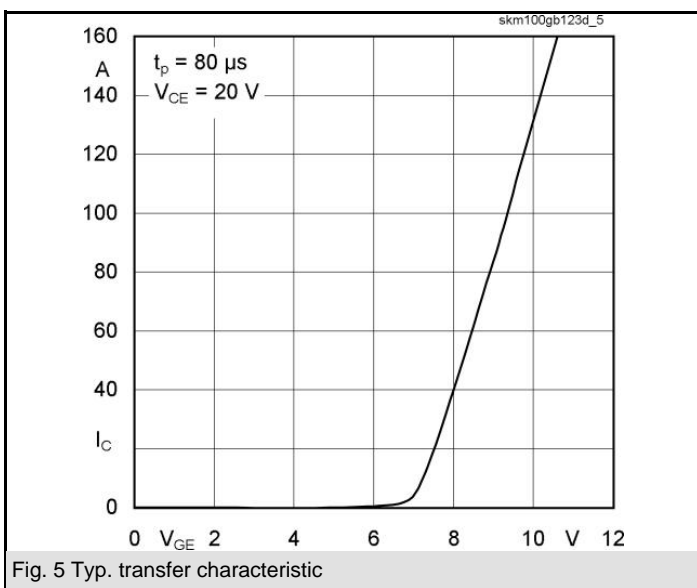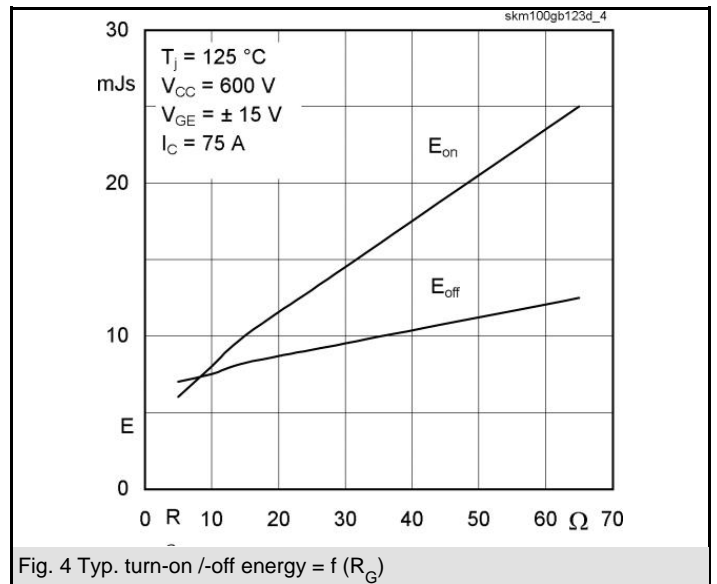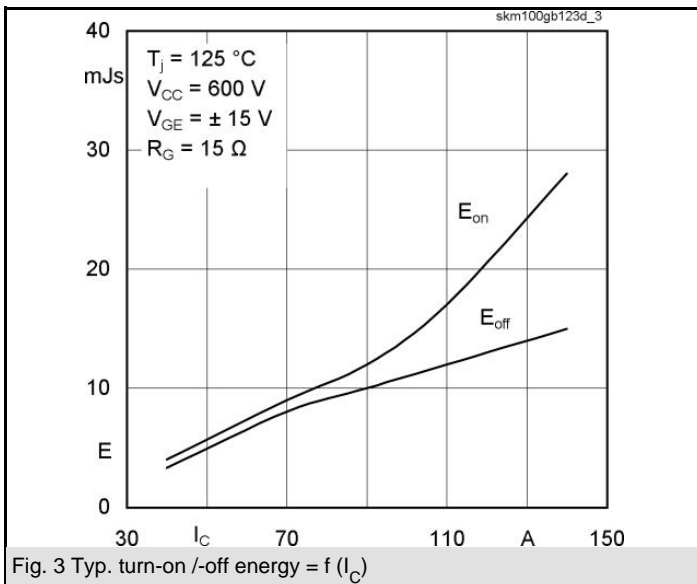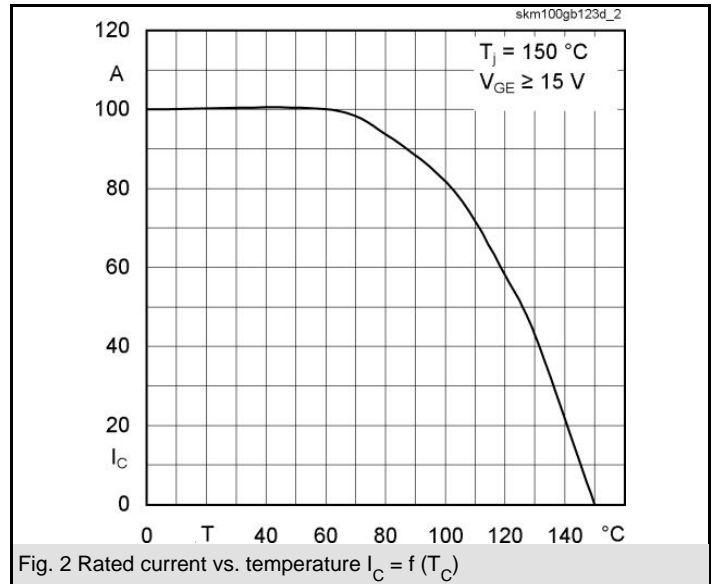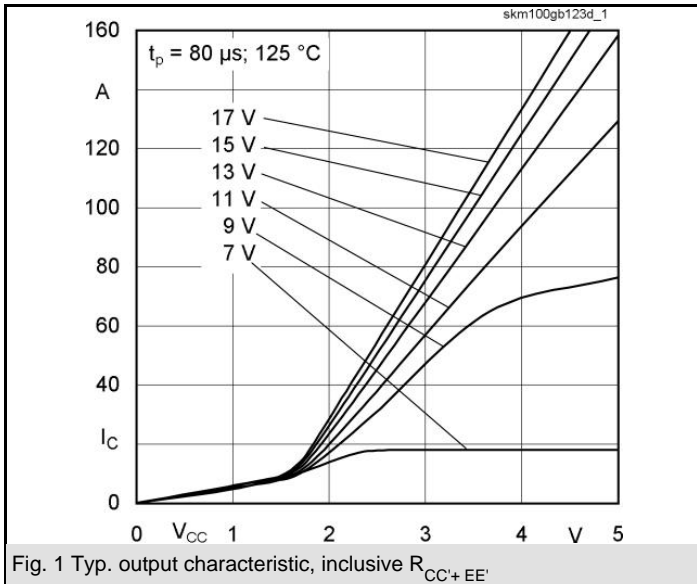

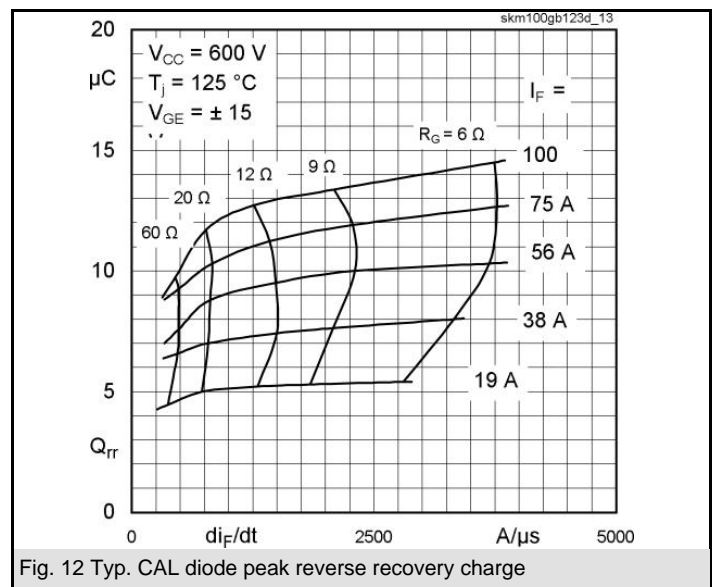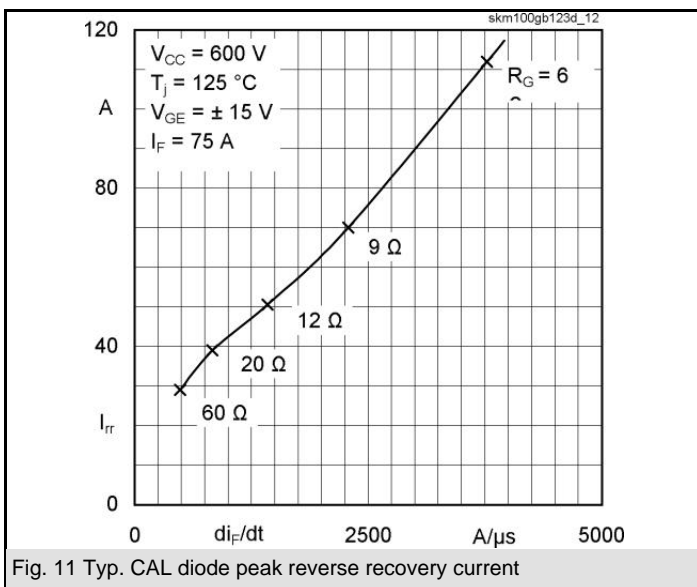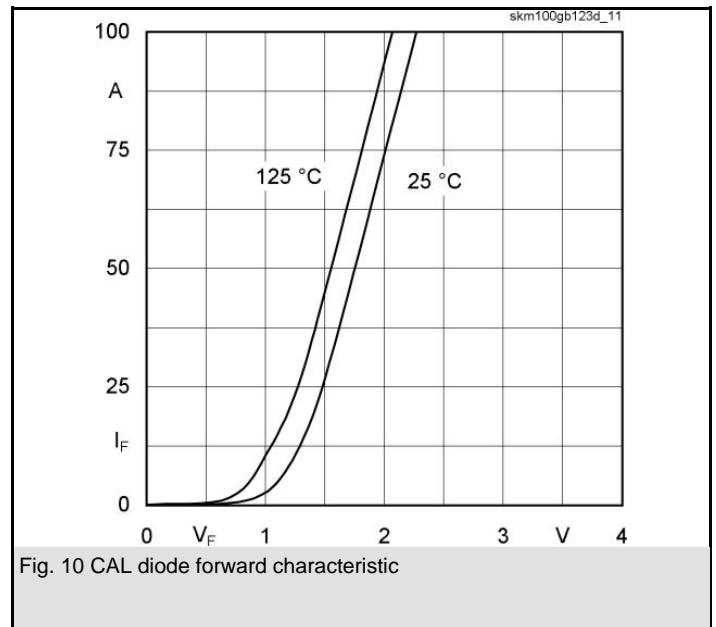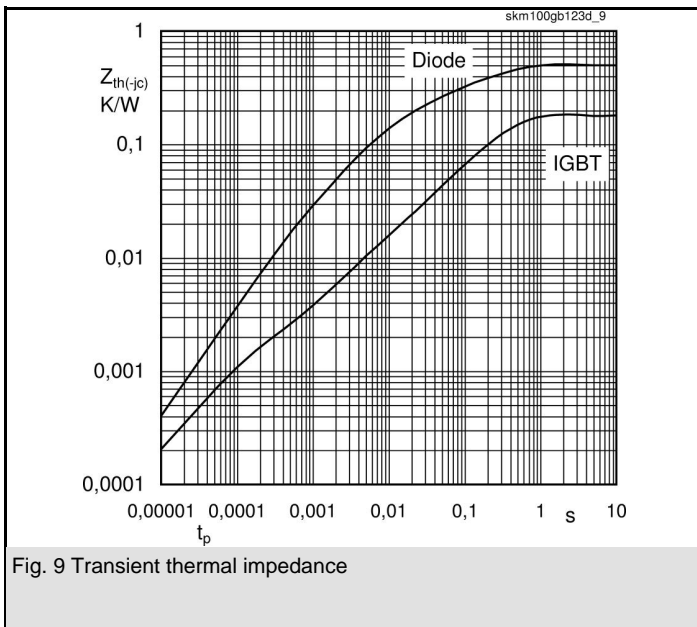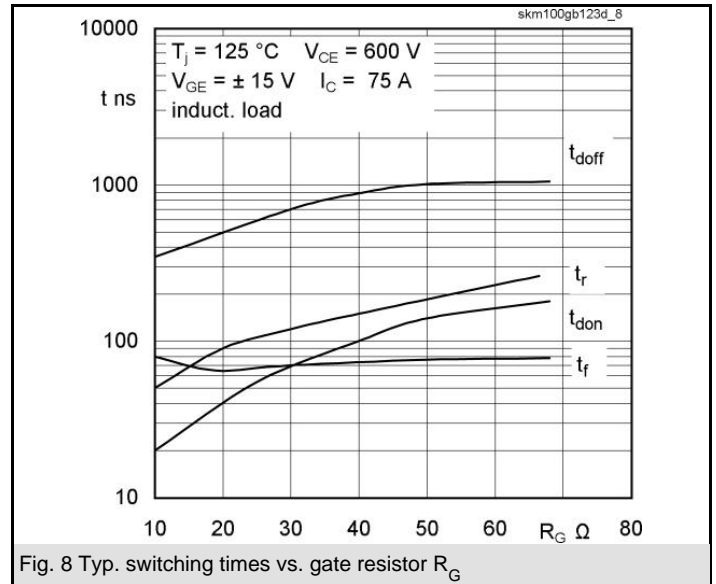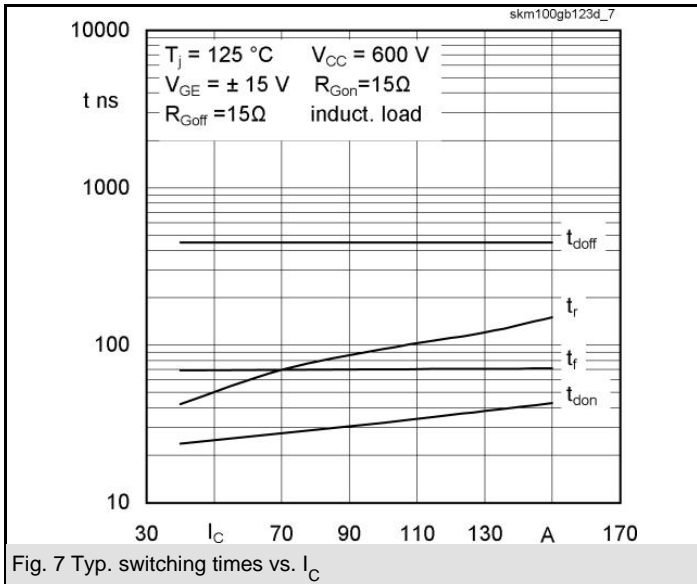


SKM 100GB123D


UL Recognized

CASED61


File 63 532

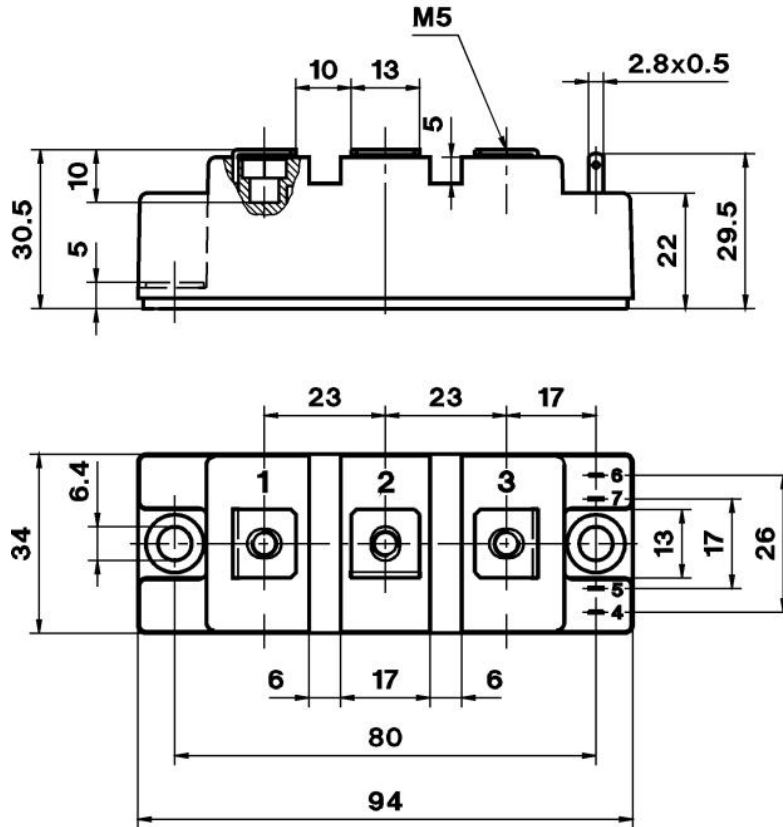


Case D 61

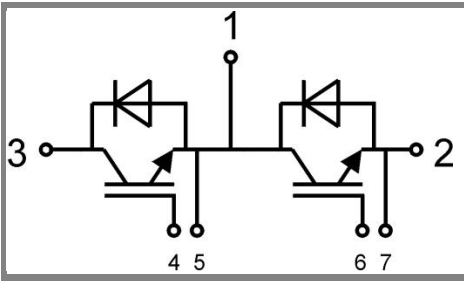

GB Case D 61

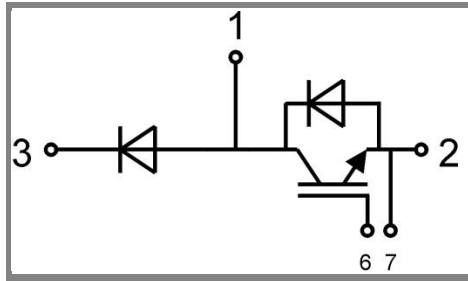

GAL Case D 62 (→ D 61)

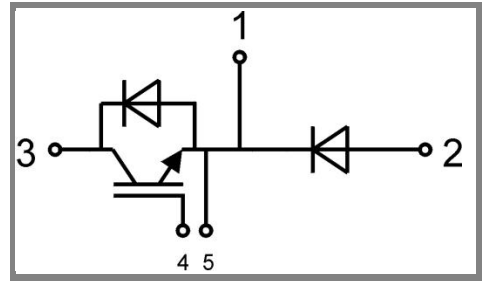

GAR Case D 63 (→ D 61)