

Coaxial Low Pass Filter

NON-CATALOG

BBLP-200+
BBLP-200

50Ω Flat Time Delay DC to 120 MHz

Maximum Ratings

| | |
|-----------------------|----------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature | -55°C to 100°C |
| RF Power Input | 0.5W max. |

Features

- flat group delay for low pulse distortion
- rugged shielded case
- other BBLP models available with wide selection of cut-off frequencies

Applications

- linear modulation techniques
- voice transmission applications
- digital communications



CASE STYLE: FF55

| Connectors | Model | Price | Qty. |
|------------|-------------|---------------------|------|
| BNC | BBLP-200(+) | Contact Sales Dept. | |


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications


| PASSBAND (MHz) (loss < 1.2 dB) Min. | fco, MHz Nom. (loss 3 dB) | STOPBAND (MHz) | | VSWR (:1) | | GROUP DELAY VARIATION (nsec) | | |
|---|---------------------------------|----------------|----------------|-----------|-----------|------------------------------|---------|------------|
| | | (loss > 10 dB) | (loss > 20 dB) | DC-0.2fco | DC-0.6fco | DC-fco | DC-2fco | DC-2.67fco |
| DC-120 | 200 | 400-534 | 534 | 1.6:1 | 1.9:1 | 0.4 | 1.3 | 1.6 |

Outline Drawing

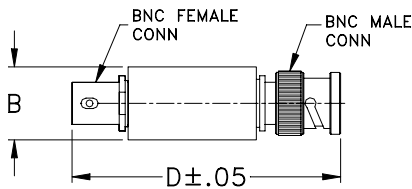


Outline Dimensions (inch/mm)

| | | |
|-------|-------|-------|
| B | D | wt |
| .54 | 2.59 | grams |
| 13.72 | 65.79 | 40.0 |


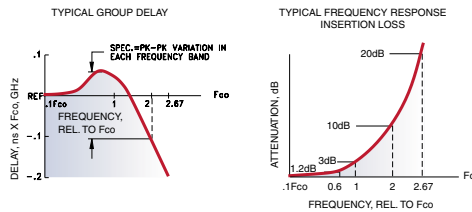


Electrical Schematic

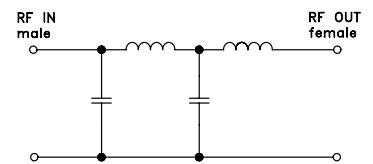

Typical Performance Data

| Frequency (MHz) | Insertion Loss (dB) | | Return Loss (dB) | Frequency (MHz) | Group Delay (nsec) |
|-----------------|---------------------|----------|------------------|-----------------|--------------------|
| | \bar{x} | σ | | | |
| 1.0 | 0.04 | 0.1 | 35.5 | 1.0 | 1.829 |
| 41.0 | 0.10 | 0.1 | 27.0 | 21.0 | 1.915 |
| 61.0 | 0.16 | 0.1 | 20.6 | 41.0 | 2.140 |
| 81.0 | 0.22 | 0.1 | 16.6 | 61.0 | 2.006 |
| 101.0 | 0.33 | 0.1 | 13.4 | 81.0 | 2.109 |
| 120.0 | 0.52 | 0.1 | 10.4 | 101.0 | 2.087 |
| 121.0 | 0.53 | 0.1 | 10.2 | 120.0 | 2.170 |
| 174.0 | 2.10 | 0.1 | 4.7 | 121.0 | 2.113 |
| 200.0 | 3.22 | 0.1 | 3.5 | 148.0 | 2.521 |
| 201.0 | 3.26 | 0.1 | 3.5 | 174.0 | 2.169 |
| 258.0 | 6.65 | 0.2 | 1.6 | 200.0 | 1.964 |
| 315.0 | 9.45 | 0.2 | 0.9 | 201.0 | 2.367 |
| 344.0 | 11.17 | 0.3 | 0.7 | 230.0 | 1.912 |
| 372.0 | 13.45 | 0.4 | 0.5 | 258.0 | 1.485 |
| 400.0 | 15.58 | 0.5 | 0.4 | 287.0 | 1.356 |
| 401.0 | 15.65 | 0.5 | 0.4 | 315.0 | 2.048 |
| 439.0 | 17.90 | 0.7 | 0.3 | 344.0 | 2.142 |
| 477.0 | 20.36 | 0.8 | 0.3 | 372.0 | 1.206 |
| 496.0 | 21.60 | 0.8 | 0.2 | 400.0 | 0.894 |
| 515.0 | 22.72 | 0.9 | 0.2 | 401.0 | 1.205 |
| 534.0 | 23.75 | 0.9 | 0.2 | 420.0 | 1.143 |
| 535.0 | 23.81 | 0.9 | 0.2 | 439.0 | 0.984 |
| 580.0 | 26.67 | 1.0 | 0.2 | 458.0 | 1.412 |
| 624.0 | 29.26 | 1.0 | 0.2 | 477.0 | 0.888 |
| 668.0 | 31.05 | 1.1 | 0.2 | 496.0 | 0.903 |
| 712.0 | 33.19 | 1.2 | 0.3 | 515.0 | 1.244 |
| 734.0 | 34.36 | 1.2 | 0.3 | 534.0 | 1.282 |
| 756.0 | 35.72 | 1.2 | 0.3 | 535.0 | 0.796 |
| 778.0 | 37.00 | 1.2 | 0.3 | 558.0 | 1.491 |
| 800.0 | 37.94 | 1.1 | 0.3 | 580.0 | 0.941 |

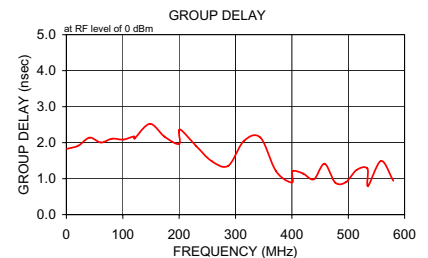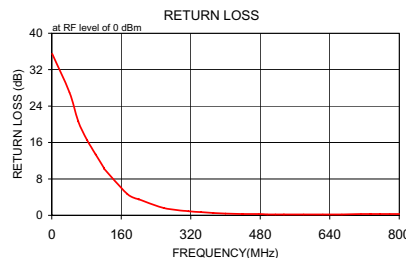

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. A
M98898
BBLP-200
070509