

Surface Mount Power Splitter/Combiner

JS4PS-1W-75

4 Way-0° 75Ω 5 to 750 MHz



CASE STYLE: BJ360

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.25W max.
Internal Dissipation	0.25W max.

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	2
PORT 1	8
PORT 2	7
PORT 3	6
PORT 4	5
GROUND	1,3,4

Outline Drawing

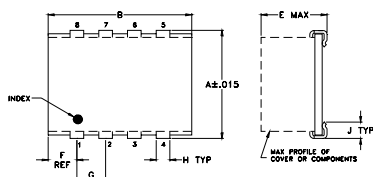

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.02

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.450	.800	--	.250	.100	.200	
11.43	20.32	--	2.54	6.35	2.54	5.08

H	J	K	L	wt
.047	.065	.065	.480	grams
1.19	1.65	1.65	12.19	1.7

Demo Board MCL P/N: TB-218 Suggested PCB Layout (PL-149)

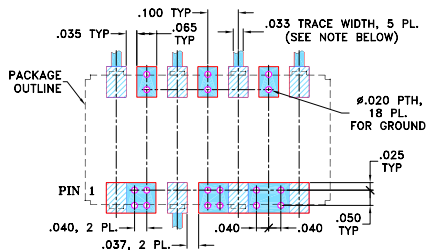

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp

Features

- high isolation, 35 dB typ.
- excellent input matching, VSWR 1.2 typ.
- very good output matching VSWR, 1.15 typ.
- excellent amplitude unbalance, 0.3 dB typ
- aqueous washable
- shielded case

Applications

- catv
- VHF/UHF
- communication systems
- instrumentation

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 6.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
f_L - f_U	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
5-750	34	25	35	25	30	18	0.6	1.2	0.6	1.5	0.8	1.5	3	5	6	0.2	0.3	0.6

L = low range [f_L to $10f_L$] M = mid range [$10f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
10.00	6.51	6.53	6.51	6.52	0.02	33.42	34.84	30.80	0.13	1.12	1.23	1.23	1.26	1.25
20.00	6.51	6.51	6.50	6.50	0.01	39.75	34.95	36.28	0.13	1.10	1.20	1.20	1.22	1.21
35.00	6.53	6.53	6.51	6.52	0.02	46.54	34.94	41.41	0.13	1.10	1.20	1.20	1.21	1.21
50.00	6.54	6.54	6.53	6.53	0.02	49.42	34.89	44.53	0.19	1.10	1.20	1.20	1.20	1.21
90.00	6.56	6.58	6.57	6.56	0.02	43.36	34.93	44.03	0.22	1.11	1.20	1.20	1.20	1.21
135.00	6.59	6.58	6.58	6.61	0.03	39.24	35.35	40.26	0.29	1.11	1.20	1.20	1.20	1.20
180.00	6.60	6.61	6.60	6.58	0.03	36.65	36.16	37.67	0.25	1.12	1.19	1.19	1.19	1.20
225.00	6.63	6.62	6.62	6.63	0.01	34.85	37.45	35.74	0.41	1.13	1.19	1.18	1.18	1.20
270.00	6.65	6.65	6.64	6.62	0.04	33.54	39.30	34.49	0.50	1.14	1.17	1.17	1.17	1.19
315.00	6.65	6.65	6.66	6.64	0.02	32.46	40.95	33.40	0.60	1.16	1.16	1.16	1.16	1.18
360.00	6.67	6.68	6.67	6.66	0.03	31.56	40.98	32.54	0.66	1.17	1.16	1.15	1.15	1.18
400.00	6.70	6.70	6.69	6.66	0.04	30.98	39.58	31.85	0.61	1.18	1.15	1.14	1.14	1.17
550.00	6.76	6.78	6.78	6.74	0.03	28.79	30.55	29.48	0.96	1.22	1.13	1.12	1.12	1.15
650.00	6.83	6.85	6.85	6.81	0.04	27.77	26.75	28.36	0.46	1.21	1.13	1.12	1.11	1.14
750.00	6.91	6.91	6.88	6.80	0.11	26.92	23.96	27.58	0.28	1.19	1.14	1.14	1.12	1.15

1. Total Loss = Insertion Loss + 6dB splitter loss.

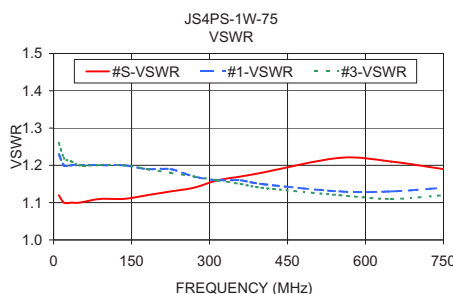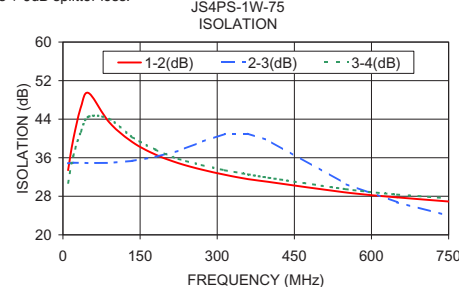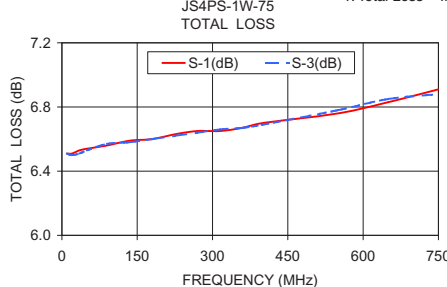

electrical schematic

